

The identification of geothermal with geographic information system and remote sensing in distric of Dolok Marawa

by Togi Tampubolon

Submission date: 19-Dec-2022 08:50PM (UTC+0700)

Submission ID: 1984480854

File name: 11._AIP_1712_ada_Cek.pdf (1.36M)

Word count: 2114

Character count: 11207

4

The identification of geothermal with geographic information system and remote sensing in distric of Dolok Marawa

Cite as: AIP Conference Proceedings 1712, 030011 (2016); <https://doi.org/10.1063/1.4941876>

Published Online: 24 February 2016

Togi Tampubolon, Khiruddin Abdullah, Lim Hwee San, et al.



View Online



Export Citation

ARTICLES YOU MAY BE INTERESTED IN

1

[Remote sensing application on geothermal exploration](#)

AIP Conference Proceedings 1554, 261 (2013); <https://doi.org/10.1063/1.4820335>

[Remote sensing for disaster mitigation of Sinabung](#)

AIP Conference Proceedings 1730, 050006 (2016); <https://doi.org/10.1063/1.4947402>

5

[Satellite Landsat for eruption of Mt. Sinabung](#)

AIP Conference Proceedings 1857, 070002 (2017); <https://doi.org/10.1063/1.4987090>



APL Quantum

CALL FOR APPLICANTS

Seeking Editor-in-Chief

The Identification of Geothermal with Geographic Information System and Remote Sensing in Distric of Dolok Marawa

Togi Tampubolon^{1, a)}, Khiruddin Abdullah², Lim Hwee San² and Jeddah Yanti¹

¹State University of Medan, Jl.Wiliam Iskandar Pasar V, Medan, 20221, Indonesia.

²Universiti Sains Malaysia, 11800 Gelugor, Pulau Pinang, Malaysia

^{a)}Corresponding author: topartam@gmail.com

Abstract. The potency of the Indonesian geothermal resources able to supply 40% of world's demand on the geothermal resources. These resources are spread over 251 locations at 33 provinces having the total potential energy of 27.149 MW. One of these geothermal resources is Tinggi Raja located at Distric of Dolok Marawa, Simalungun Régency, North Sumatera 449385 E – 473025 E and 324105 N - 349545 N. This paper reports the study on mapping of the prospect of geothermal resource area by utilizing a remote sensing. The remote sensing consisted of Landsat 8 OLI which was published on February 8th 2015 and June 29th 2015 with Path 129 Row 58 as input data for ENVI 4.7 and ArcGIS 10 as mapping tools. Calculated land surface temperature (LST) was essential for mapping and calculating a geothermal resources. In this study, land surface temperature was used as the Thermal Infrared images obtained from the thermal infrared remote sensor. The highest achieved LST was 310.889587 K. The obtained LST distribution indicated the location of the geothermal potential.

INTRODUCTION

The world energy demand increases tremendously related with the high economic growth of several developed countries. It is inversely proportional to the energy supply which is limited for non-renewable energy resources. One of renewable energy resources is a geothermal energy which is a clean and friendly energy alternative and also renewable. The potential of geothermal energy in Indonesia covered 40% of the world's, spread over 251 locations at 33 provinces with a total potential energy of 27.140 MW which is equivalent to 219 Billion Barrels of oil equivalent [1]. The utilization of the geothermal install capacity is 1.094 MW or 4% of all the existing potential resources. One of Indonesian island is Sumatra island that location at the confluence of two tectonic plates, the Eurasian Plate and Indo-Australian plate, causing frequent earthquakes and possess a potential geothermal areas. Sumatra Island has geothermal potential sources up to 13.470 MW which is the biggest potential compared to other islands [2]. One of area that potential of geothermal is Distric of Dolok Marawa on 02°36' - 03°18' North latitude and 98°32' - 99°35' East longitude obviously supported by the existence of the hot springs [3].

Geothermal resources located inside the Earth and difficult terrain caused challenging on the exploitation of the energy resources. Therefore, we need new technology such as a remote sensing technology which capable to identify location of geothermal potential [3, 4]. The utilization of a remote sensing technology is to obtain the location the exploitation of geothermal. The imagery satellite such as Landsat satellite use to search the location of the geothermal energy provided the thermal infrared images. The thermal infrared images are measured using a thermal infrared remote sensing (TIRS) method. TIRS method is an effective technique to overcome these limitations in data distributions because active geothermal fields accompany surface manifestations of the transport of heat and mass through the crust such as volcanoes, hot springs, mud pots and fumaroles, which can be distinguished as thermal high anomalies in the Land Surface Temperature (LST). TIR has great potential for cost-effective geothermal resource exploration [4]. This study utilize TIRS of Landsat 8 OLI (path 058 and row 129)

which able to predict the energy potential for several years in the future. Similar studies using a remote sensing were conducted for geothermal prospect in the Patuha area, West Java [5], Silali geothermal prospect in Kenya [6], hot springs in Nevada, USA [7], and in Hokkaido, Northern Japan [8]. Therefore, in this study on the geothermal potential was focus in the location of research interest of Dolok Marawa area by using a remote sensing method.

GEOGRAPHIC INFORMATION SYSTEM AND REMOTE SENSING METHOD

Remote sensing is an art and science to get the information about an object, area or phenomenon. It obtains analysis of data simply with using tools without contact with the object, area or phenomenon [9]. Remote sensing uses spatial data such as satellite images, i.e. Landsat [10] such as Landsat 8 OLI. The satellite images of Landsat 8 has a features of 705 km wides from the earth's surface, and a scanning area of measurement 185 km × 185 km. NASA Landsat 8 OLI targeting a mission over 5 years of operation (OLI sensor designed for 5 years and TIRS sensor designed for 3 years). Landsat 8 satellite have 2 sensors, Operational Land Imager (OLI) and the Thermal Infrared Sensor (TIRS). Landsat 8 satellite have 11 numbers of channels includes 9 channels (bands 1-9) for OLI and 2 channels (band 10 and 11) for TIRS [10]. TIRS can be applied to identify geothermal potential by finding the values of Land surface temperatures (LST) or T. The LST are found by using corrected TIRS from band 10. The correction is radiometric correction (digital converting number to radiance) calculation with the formula using LMIN and LMAX spectral radiance scaling factors as described in Eq. 1 [11].

$$L_{\lambda} = \left(\frac{LMAX_{\lambda} - LMIN_{\lambda}}{QCAL_{MAX} - QCAL_{MIN}} \right) \times (QCAL - QCAL_{min}) + LMIN_{\lambda} \quad (1)$$

where:

L_{λ} = The cell value as radiance
 $QCAL$ = Digital number
 $LMIN_{\lambda}$ = Spectral radiance scales to $QCAL_{MIN}$
 $LMAX_{\lambda}$ = Spectral radiance scales to $QCAL_{MAX}$
 $QCAL_{MIN}$ = The minimum quantized calibrated pixel value
 $QCAL_{MAX}$ = The maximum quantized calibrated pixel value

After converting the digital number to radiance, then the radiance values is converted into the temperature unit, such as Kelvin using Eq. (2) [11].

$$T = \frac{K_2}{\ln\left(\frac{K_1}{L_{\lambda}} + 1\right)} \quad (2)$$

where:

T = Temperature in Kelvin
 L_{λ} = The cell value as radiance
 K_1 = Constanta 1, 1321.08
 K_2 = Constanta 2, 774.89

If necessary, the temperature in Kelvin is converted into Celsius using formula in Eq. (3).

$$T(C) = T(K) - 273 \quad (3)$$

where:

$T(K)$ = Temperature (Kelvin)
 $T(C)$ = Temperature (Celcius)

Briefly, the methodology on determining the geothermal potential was conducted by calculating the estimates temperatures of the LST values on the respected research location research by obtaining the thermal infrared image.

Research Location

The research area was the geothermal Tinggi Raja's village, Distric of Dolok Merawa located on geographic coordinates between 449385 E – 473025 E and 324105 N - 349545 N.

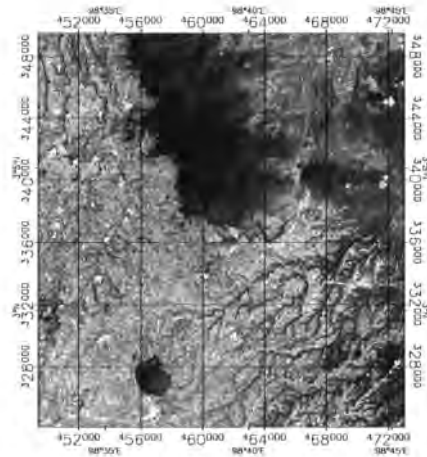


FIGURE 1. Research Location

Tools, Data and Procedure

The mapping tools used to find LST value and NDVI value were represented in Table 1. The data used for this study was depicted in Table 2. Procedure on calculating the estimates temperature to find geothermal resources as follows: by using the Land surface temperature formula by inserting the thermal infrared image from thermal infrared remote sensor (TIRS) of Landsat 8 OLI (Path 129 and Row 58). Thermal infrared image was cropped in the study area (Distric of Dolok Marawa), and then correction was calculated by using correction radiometric formula. Finally, land surface temperature (Kelvin) values obtained by inserting the radiometric values using Eq. (2) and converting the LST value in kelvin to celcius. Futhermore, LST values was classified from low to highest temperature to evaluate the geothermal prospect.

TABLE 1. Table of tool research

No	Name	Spesification	Total
1.	Laptop	Intel core i3	1
	1. ArcGIS 10.0	HDD 500 MB	
	2. ENVI 5.0	RAM 2GB	

TABLE 2 . Research data

No	Name	Spesification	Total
1.	Landsat 8 OLI path 129 row 058	Band 10 Thermal Infrared – 100 m	1
2.	Administration boundaries	Distric Simalungun	1

RESULTS AND DISCUSSIONS

Figure 2a and b show the result of the radiometric correction and corresponding LST values for the received data on February 8th 2015. While Fig. 2c and d show the result of the radiometric correction and corresponding LST values for the received data on June 29th 2015. The result of radiometric correction at different color where black indicating lowest values to white indicating the highest value. The maximum value of LST for the received data on February 8th 2015 was 36.303497 °C and minimum value was 2.720490 °C. The maximum value of LST for the received data on June 29th 2015 was 37.738098 °C and minimum value was 18.476654 °C. It was observed that the temperature was increased, as shown in Fig. 2.a-d.

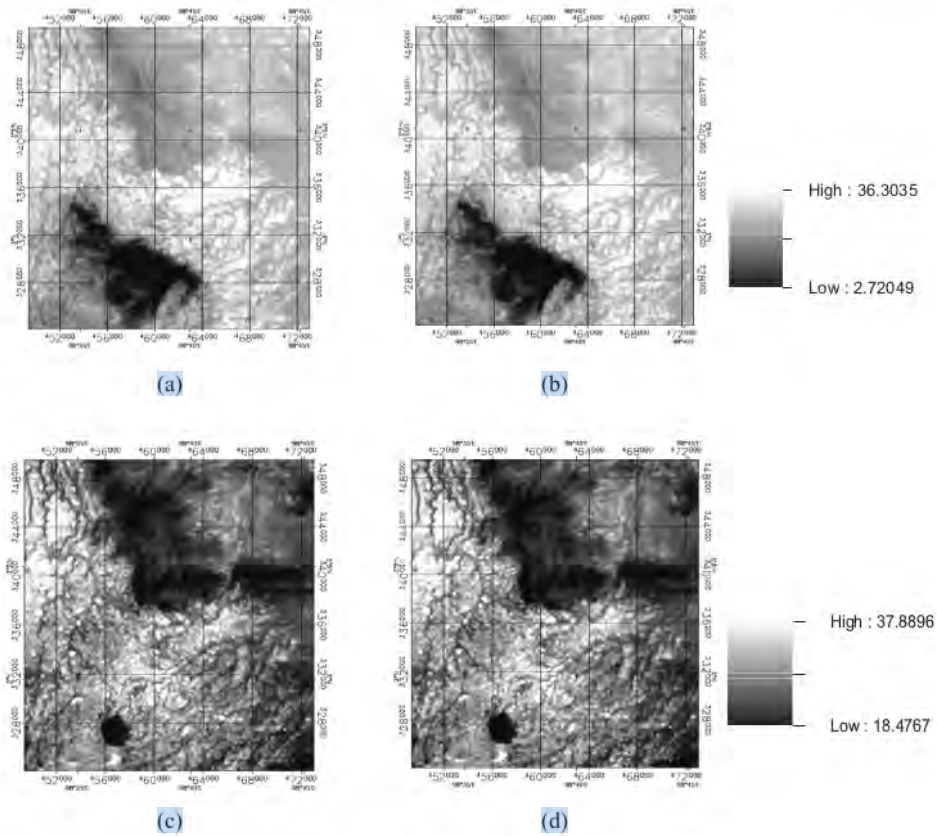


FIGURE 2. LST of the Distric Dolok Marawa (a), (b), (c) and (d)

The highest value of LST was found at coordinates 450285.00 E, 341895.00N meters with LST value of 37.738098°C. This location observation point most probably indicating the potential of geothermal energy. It is also possible represent the LST values both vertically and horizontally includes the highest comparison value of the constant $k (1/\lambda)$, as shown in Fig 3.

Futhermore, the LST result at June 29th 2015 was classified into some categories. The categories were low, modere, high and very high. The minimum temperature (< 20 °C) has identified as black color, for temperature claffication of 20 – 25 °C identified as ash gray color, temperature claffication of 25 – 30 °C identified as gray color, and higher 30 °C identified as white color. Finally, the distribution of classified temperature was achieved and used for predicting the potential of the geothermal energy as shown in Fig. 4. Thus, it was verified that calculated temperature from thermal infrared image could be predicting the geothermal resources area and could be used as a reference on exploitation.

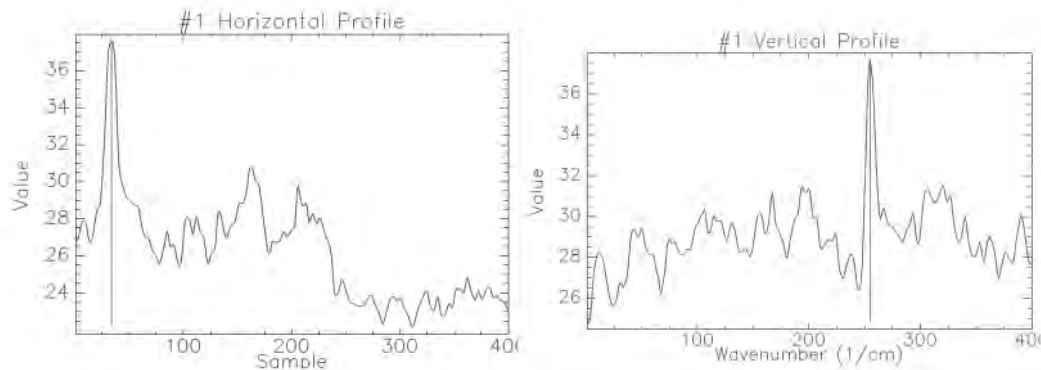


FIGURE 3. Horizontal and vertical profile of the predated point of geothermal resource

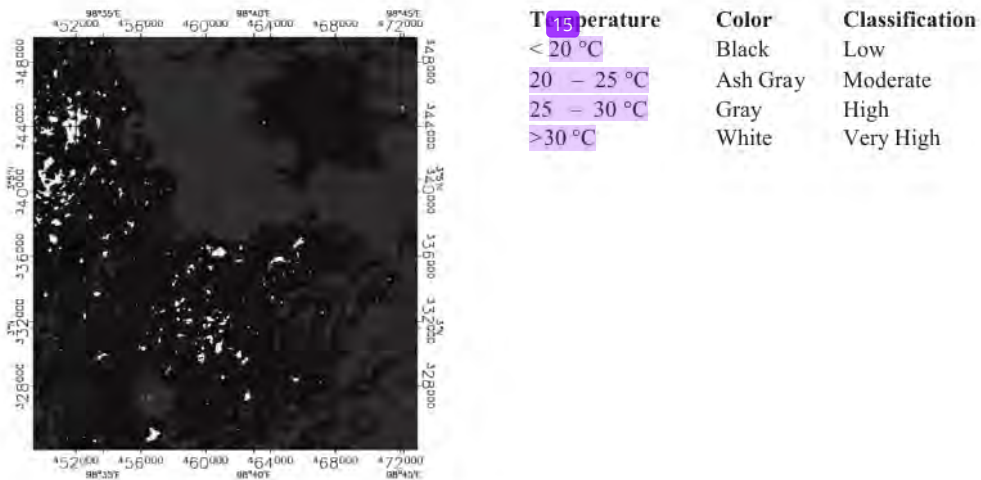


FIGURE 4. Classification of LST

CONCLUSION

6 The identification of geothermal resources was successfully found utilize the thermal infrared remote sensing method provided the Land Surface Temperature of Landsat 8 published on February 8th 2015 and June 29th 2015. The maximum value of LST for data of February 8th 2015 was 36.303497 °C and minimum value was 2.720490 °C. The maximum value of LST for the received data of June 29th 2015 was 37.889587 °C and minimum value was 18.476654 °C. Thus it was concluded that the location of research areas in the village Dolok Merawa was potentially for geothermal energy resource and this result can be used as a reference for further exploitation of geothermal.

REFERENCES

1. Anonim, *Development of the Mining Working Area Status Geothermal* (Ministry of Energy and Mineral Resources KESDM, Jakarta, 2011).

2. Anonim, "Geographical Simalungun," Central Bureau of Statistics, Government Office of Simalungun Regecy, (2014).
3. J. R. Jensen, *Remote Sensing of the Environment: An Earth Resource Perspective* (Upper Saddle River, NJ, Prentice Hall, 2000), pp. 544.
4. C. P. Lo, *Applied Remote Sensing*, (University Indonesia, Jakarta, 1996), pp. 24 – 29.
5. M. N. Siahaan, A. Soebandrio and K. Wikantika, *Geothermal Potential Exploration Using Remote Sensing Technique (Case Study: Patuha Area, West Java)* (Asia Geospatial Forum, Indonesia, 2011), pp. 1–13.
6. J. Mutua, *High Resolution Airborne Thermal Infrared Remote Sensing Study, Silali Geothermal Prospect, Kenya* (Geothermal Development Company, Kenya, 2013), pp. 1 – 10.
7. M. F. Coolbaugh, *Detection of Geothermal Anomalies using Advanced Spaceborne Thermal Emission and Reflection Radiometer (ASTER) Thermal Infrared Images at Bradys Hot Springs, Nevada, USA* (Elsevier, USA, 2007), pp. 350–359.
8. B. Tian, *Remote Sens.* **7(3)**, 2647-2667 (2015).
9. T. M. Lillesand and F. W. Kiefer, *Remote Sensing and Image Interpretation* (Gadjah Mada University Press, Yogyakarta, 1989), pp. 120–140.
10. Anonim, *Landsat 7 Science Data User Handbook*, (NASA Press. US, 2014), pp 21–25.
11. A. Rikimaru, P. S. Roy and S. Miyatake, *J. Trop. Ecol.* **43 (1)**, 39-47 (2002).

The identification of geothermal with geographic information system and remote sensing in distric of Dolok Marawa

ORIGINALITY REPORT

20%
SIMILARITY INDEX

18%
INTERNET SOURCES

11%
PUBLICATIONS

12%
STUDENT PAPERS

PRIMARY SOURCES

1 aip.scitation.org Internet Source **5%**

2 hdl.handle.net Internet Source **4%**

3 Submitted to Cyprus University of Technology Student Paper **2%**

4 jurnal.lapan.go.id Internet Source **1%**

5 Submitted to Universitas Negeri Jakarta Student Paper **1%**

6 www.researchgate.net Internet Source **1%**

7 s3.amazonaws.com Internet Source **1%**

8 Submitted to Universiti Sains Malaysia Student Paper **1%**

9 bahasaindonesiaanna.blogspot.com Internet Source **1%**

10	idr.nitk.ac.in Internet Source	1 %
11	id.scribd.com Internet Source	1 %
12	uest.ntua.gr Internet Source	1 %
13	Togi Tampubolon, Jeddah Yanti, Rita Juliani, Juniar Hutahaeen. "The influence of Mount Sinabung eruption on the geothermal in Tinggi Raja Simalungun", Physics and Chemistry of the Earth, Parts A/B/C, 2022 Publication	1 %
14	Yuanyuan Pan, Cheng Lu, Hailing Dong, Lingjun Yu, Gang Liu, Huarong Tan. "Disruption of rimP-SC, encoding a ribosome assembly cofactor, markedly enhances the production of several antibiotics in Streptomyces coelicolor", Microbial Cell Factories, 2013 Publication	1 %
15	ftp.iza.org Internet Source	1 %

Exclude quotes On

Exclude matches < 1%

Exclude bibliography On