

The logo of Universitas Negeri Medan (UNIMED) is a circular emblem with a scalloped border. It features a central sunburst above a stylized green plant with two leaves. The text "UNIVERSITAS NEGERI MEDAN" is written in a semi-circle at the top, and "UNIMED" is at the bottom. Two small square icons are positioned on the left and right sides of the emblem.

3-Development of a

by Ps 3-janter

The logo for "The Character Building University" features the words "THE" and "UNIVERSITY" in a simple, uppercase, sans-serif font. The words "Character Building" are written in a large, elegant, cursive script font between them.

THE
Character Building
UNIVERSITY

Submission date: 24-Mar-2023 04:17PM (UTC+0700)

Submission ID: 2045279906

File name: ization_Thermodynamic_and_Thermal_Operating_Parameters_Study.pdf (668.4K)

Word count: 7471

Character count: 40559



Journal of Advanced Research in Fluid Mechanics and Thermal Sciences

Journal homepage:

https://semarakilmu.com.my/journals/index.php/fluid_mechanics_thermal_sciences/index

ISSN: 2289-7879



Development of a Small-Scale Electricity Generation Plant Integrated on Biomass Carbonization: Thermodynamic and Thermal Operating Parameters Study

Baharuddin¹, Janter Pangaduan Simanjuntak^{2,*}, Eka Daryanto², Bisrul Hapis Tambunan², Hanapi Hasan², Samsudin Anis³, Mochamad Syamsiro⁴

¹ Electrical Engineering Department, Universitas Negeri Medan, Medan 20221, North Sumatera, Indonesia

² Mechanical Engineering Department, Universitas Negeri Medan, Medan 20221, North Sumatera, Indonesia

³ Mechanical Engineering Department, Universitas Negeri Semarang, Kampus Sekaran, Gunungpati, Semarang 50229, Indonesia

⁴ Mechanical Engineering Department, Universitas Janabadra Yogyakarta 55231, Indonesia

ARTICLE INFO

Article history:

Received 10 November 2021

Received in revised form 5 March 2022

Accepted 7 March 2022

Available online 3 April 2022

Keywords:

Biomass; combustion; pyrolysis; stove; hot flue gas; ORC

ABSTRACT

Biomass has been known as a source of energy with a thermochemical process that produces heat and can be converted further into electricity. However, thermal energy losses are a huge problem during combustion. To overcome this problem, a system based on organic Rankine cycle (ORCs) was developed to recover and utilize them to generate electricity. The proposed ORCs include an evaporator, a turbine, a condenser, and a pump coupled with a biomass carbonizing system to create a promising technology for small-scale electricity generation. In this work, a thermodynamic modelling equation based on energy and exergy balances was briefly expressed for each subcomponent of the system. A case study with R134a as the working fluid is being investigated to validate the system's performance. In addition to the effects of R134a on temperature at the turbine exit, the suitable operating pressures has been specially adopted from several valid journals that focused on the effects of a wide range of possible operating pressure on the working fluid characteristics, which have a significant effect on the system performance. Finally, the theoretical analysis shows that the turbine work is profitable at an inlet pressure of 5 bar and an outlet pressure of 2 bar. This system is recommended to be integrated into the thermochemical biomass process. Recommendations have been made for the future development of small-scale biomass-fuelled power generation systems. This study shows that the thermal losses of the biomass thermochemical processes can be theoretically recovered in the form of electricity by using ORC efficiently.

1. Introduction

Until now, the utilization of biomass in the world as an energy source has increased significantly. Several researchers have also stated that biomass energy utilization can reduce greenhouse effects, gas emissions, and climate change [1-3]. Turning biomass into heat using

* Corresponding author.

E-mail address: janterps@unimed.ac.id

<https://doi.org/10.37934/arfmts.94.1.7995>

various types of furnaces, such as stoves, usually happens at a high temperature of about 800–1000 °C. However, the performance of this kind of stove is still under investigation by researchers in order to increase its performance and reduce energy losses. In fact, high-temperature combustion is associated with huge energy losses, usually from the wall of the stove or even from outflowing hot flue gases. The exhaust flue gas with a temperature above 200 °C is usually sacrificed freely into the ambient, which results in both energy losses and extreme air pollution. According to the related regulations, the exhaust flue gas can be released to the atmosphere at a temperature of up to 60 °C. In conclusion, not all the considerable heat can be converted into another energy form.

In general, there are two ways of converting biomass into other forms of energy; the biochemical process [4], and the thermochemical process [5]. In this study, thermochemical processes are discussed with the conversion routes as pictured in Figure 1. Combustion is a very attractive method of producing high thermal energy or heat, which includes including heat in the exhaust gas streams. This thermal energy can be stored and utilized further for drying or heating purposes. A simple way of storing thermal energy has been theoretically studied by using a water tank with a thermocline model [6]. The thermal energy can also be utilized to produce electricity, which can be integrated into the grid or even be used privately.

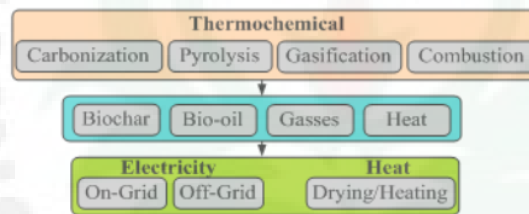


Fig. 1. State of the art of thermochemical way on biomass conversion process

Another energy source is in the form of flammable gas, which can also be generated by the gasification process. Gasifiers with high efficiency, however, are still in development. A novel fluidized gasifier with concentric cylinders has been hydrodynamically simulated and demonstrated the ability to produce high-calorific flammable gas [7]. This new gasifier can produce flammable gas with a heating value of about 7 MJ/m³ higher than the conventional gasifier [8]. This flammable gas is very appealing as a replacement for fossil fuel in fuelled engines. Syngas of about 3 MJ/m³ of heating value can easily be produced by means of a downdraft gasifier, which has the potential to replace the old fuel [9].

The thermochemical process is the most preferred method because it has a few advantages compared to the biochemical process. The equipment used is also not too complicated. Using a modified stove, for instance, can achieve an efficiency of up to 35% [10]. This has been confirmed by performing an experimental study with an internal air distributor placed in the centre of a modified stove. They obtained that the stove efficiency is about 25% [11] higher than the conventional stove. However, this is still a very low conversion efficiency associated with the energy contained in the biomass. The stove could not stand alone to convert all the stored energy in the biomass completely. Other supporting systems and equipment are essential in order to achieve maximum conversion efficiency [12].

A system with a combination of several equipment working together to generate electricity and reuse rejected heat is called a combined heat and power system (CHP). By considering heat waste, an internal combustion engine, for instance, converts only 25–38% of the fuel's thermal energy into

shaft work. Some of it is rejected through the cooling system, the engine wall, and the exhaust gases as dispersed energy [13]. While used as the prime mover of a generator, internal combustion engines of small size can achieve electrical efficiencies of around 20 to 30% [14].

Until now, investigations into the reuse of wasted energy, including waste heat from engines, using thermodynamic studies have been widely used in research and development related to renewable energy [15,16,17,18,19,20,21,22]. As shown in Table 1, the Rankine cycle with water as the working fluid has been used widely to convert mostly energy from fossil fuels into electricity. However, the Rankine cycle is available only for high contained energy sources such as from fuel combustion. For low to medium heat sources, for instance, waste energy contained in the exhaust flue gases of industry, the Rankine cycle is no longer effective and efficient.

Table 1
 Large-Scale Electric Power Generation through 2050 from Renewable and Non-renewable [23]

| Power plant type | Non-renewable source | Renewable source | Thermodynamic cycle |
|----------------------------|----------------------|------------------|---------------------|
| Coal-fuelled | Yes | | Rankine |
| Natural gas-fuelled | Yes | | Brayton |
| Nuclear fuelled | Yes | | Rankine |
| Oil-fuelled | Yes | | Rankine |
| Biomass-fuelled | | Yes | Rankine |
| Geothermal | | Yes | Rankine |
| Solar-concentrating | | Yes | Rankine |
| Hydroelectric | | Yes | None |
| Wind | | Yes | None |
| Solar-photovoltaic | | Yes | None |
| Fuel cells | Yes | | None |
| Currents, tides, and waves | | Yes | None |

For low grade or even moderate temperature energy sources (less than 300 °C), an organic Rankine cycle (ORC) is the most potential technology to recover waste energy [24,25,26]. ORC has been received as an attractive way to absorb the rejected heat in the range of low, medium, and high energy content and be converted into electrical energy. ORC employs organic substances as working fluids instead of water, including R123, R245fa, and R134a. The organic working fluid is typically selected to meet the requirements of the application. For instance, the relatively low boiling point of these substances allows the ORC to produce power from low temperature sources, including industrial waste heat, geothermal hot water, and fluids heated by concentrating solar collectors.

The number of published articles on waste energy harvesting based on ORC is rapidly increasing. Hung *et al.*, [27], Maier *et al.*, [28,29], Liu *et al.*, [30], Hung [31], Saleh *et al.*, [32], Li *et al.*, [33], Li *et al.*, [34], Uusitalo *et al.*, [35] proposed and analysed various ORCs for waste heat recovery systems. Meanwhile, He *et al.*, [36], Shu *et al.*, [37], Wang *et al.*, [38], Wu *et al.*, [39], Islam *et al.*, [40], Saadon *et al.*, [41] showed their interest in the waste heat recovery from internal combustion engine or gasoline engine. Pantaleo *et al.*, [42] uses ORC integrated with steam and gas turbine. Tchouche *et al.*, [43], Hung *et al.*, [44], Trifon *et al.*, [45], Petrollese *et al.*, [46] shown their interest in the application of ORCs in solar organic Rankine cycle systems. Vittorini, *et al.*, [47], Dijoux, *et al.*, [48] also considering the system efficiency of ORC using ocean thermal energy conversion (OTEC) system as heat source.

Numerous ORC units have been installed in industries such as cement, steel, glass, and oil-gas industries to recover wasted energy from their machines. However, research concerning waste energy harvesting from thermochemical biomass processing, which is focused on the smoke

Condensation of wood carbonizing manufacture, is still rare. Rahbar *et al.*, [21] described a feasibility study of power generation through waste heat recovery from wood-burning stoves using the ORC technology. Velez *et al.*, [49] concerned a technical, economic, and market review of ORC for the conversion of low-grade heat for power generation. Carraro *et al.*, [50] performed cogeneration based on biomass and ORC systems and successfully obtained 2.2 kW of electricity. Cao *et al.*, [51] used biomass to fuel an externally fuelled gas turbine. Algieri *et al.*, [52] demonstrate a cycle for micro-scale CHP using subcritical and transcritical biomass-fired ORC systems. Mascuch *et al.*, [53] investigated woodchip combustion fuelled ORC for use as a biomass boiler replacement. Meanwhile, Germany is the biggest country in the world by producing electricity at a rate of about 40.1 MW based on biomass-powered ORC [54]. Another potential application has been identified as exhaust gas recovery from gas turbines [55,56,57]. In addition, ORC exhibits unique advantages such as small size, low capital and maintenance cost, simplicity, and high reliability when combined with renewables such as biomass, solar energy, or geothermal heat.

The ORC can also be integrated with charcoal-based biomass and condensate smoke manufacture where the torrefaction process is employed. In this process, the thermal decomposition of wood is carried out under controlled conditions, usually without or with very limited oxygen. With relatively long residence times at temperatures (200–300°C), up to 35% of char can be obtained [58]. Other products are liquids and gases. During the process, lots of smoke is generated due to the incomplete combustion in the reactor. The smoke can be condensed to a liquid state instead of being reused for drying. A heat exchanger of the shell and tube type can be employed with water as the cooling medium instead of air. During the smoke condensing process, the cooling water adsorbs heat, causing its temperature to increase. The hot water is then used in the ORC to evaporate the organic working fluid. In some industries, the traditional condensation processes may still be in use where the condensing process using a simple batch and ambient air as the cooling medium causes the condensate produced to have low quality and quantity.

The thermodynamic performance of a novel small-scale electricity generation system based on heat harvested from smoke condensation and integrated with the ORC system is investigated in this paper. The proposed system provides several advantages, such as fuel flexibility, saving fuel during the whole process, and increasing the enterprise revenue. The aim of this paper is to study the appropriate operational parameters of the ORCs system proposed to better understand the factors that lead to variability and uncertainty in this system due to the heat availability from the condensation system. Discussions have been focused on the effect of the exhaust temperature, condenser pressure, working fluid mass, and flow rate in the whole system on the cycle performance. The parameters used are based on numerous previous researchers and confirmed by Quoilin *et al.*, [59], Morrone *et al.*, [60], and Ambarita *et al.*, [61], and Wang *et al.*, [62].

2. System Description

The system developed in this study is illustrated in Figure 2. The system is a kind of simple one with the basic components consisting of (1) the working fluid pump, in which the working fluid is circulated and adjusted through the control valve (CV) and measured by means of a rotameter (R), (2) the working fluid evaporator, where the working fluid of organic type is boiled, (3) the steam turbine, which expands the working fluid in vapour form to gain useful shaft power, and (4) the working fluid condenser, where the working fluid is cooled and changed into liquid form. The features of this system are small size, no emissions, and environmentally friendly. The organic fluid evaporator receives heat from the hot water which is gained during hot smoke condensation. The

hot water temperature is approximately ($T_1 = 95\text{ }^\circ\text{C}$) entering the evaporator where the selected working fluid in the liquid state is evaporated. After that, the water leaves the evaporator at approximately $T_2 = 35\text{ }^\circ\text{C}$, as designed, and is pumped back into the water tank. A throttle valve was adopted in the bypass line to protect the turbine during the starting and closing processes.

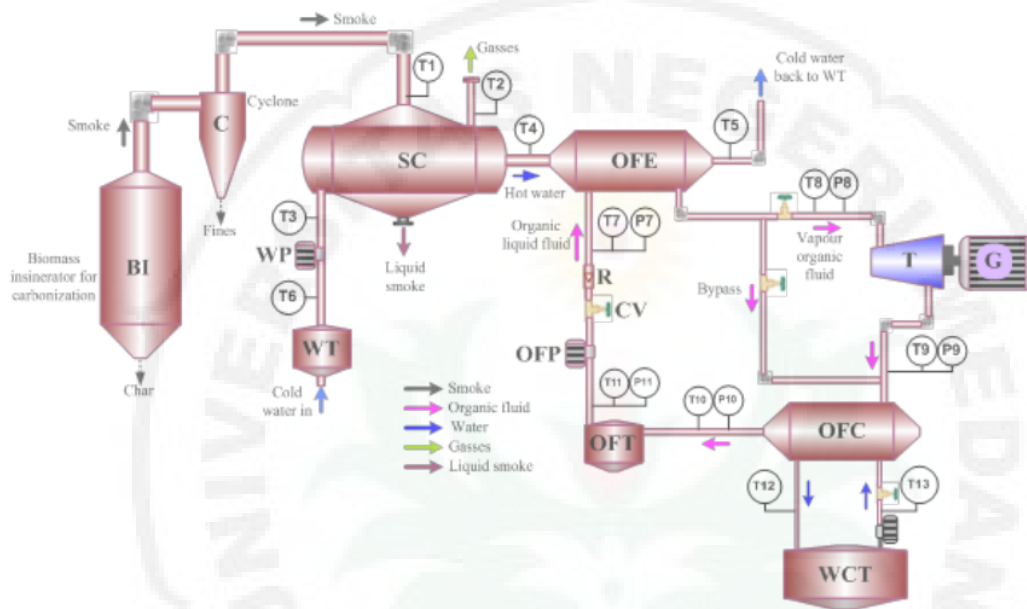


Fig. 2. Schematic diagram of ORC system integrated with wood carbonization process; Biomass carbonizer (BC), Cyclone (C), Smoke condenser (SC), Organic fluid evaporator (OFE), Turbine (T), Organic fluid condenser (OFC), Organic fluid feed pump (OFP), Water cooling tank (WCT), Generator (G)

3. Organic Fluid Selection

Selection of the working fluids in an ORC system is a crucial aspect. Lots of working fluid candidates can be found in the literature. However, in this study, the working fluid used refers to previous studies by numerous researchers, as shown in Table 2. The exact working fluid, which is suitable to be implemented in this ORC, is shown in Figure 3. It is also used as the guide.



Table 2
 Working fluid and operating parameters of some ORCs system

| No | Working fluid | Component conditions | Values | Reff |
|----|------------------------------|-----------------------|-------------------|----------|
| 1 | R123 | Condenser outlet | 23-30°C | [19] |
| | | Evaporation | 80-110°C | |
| | | Turbine inlet | 130°C | [59] |
| | | Heat source | 50-90°C | [60] |
| | | Turbine inlet | 101.7-165.2°C | [26, 27] |
| | | Heat source | 85.95, 110, 130°C | [61, 62] |
| | | Turbine inlet | 101.7-165.2°C | |
| | | Heat source | 72°C | [63] |
| | | Condenser outlet | 90-220°C | |
| | | Heat source | 90-220°C | [64] |
| 2 | R245fa | Heat source | 100°C | [65] |
| | | Condenser temperature | 21.86-43.63°C | |
| | | Heat source | 77.9°C | [66] |
| | | Cooling water | 11.5-21°C | |
| | | Evaporation | 77.1-82.3°C | [67] |
| | | Condenser outlet | 37.4-40.3°C | |
| | | Expander inlet | 50-115°C | [20] |
| | | Heat source | 90°C | [68] |
| | | Heat source | 100-150°C | [69] |
| | | Heat source | 125°C | [67] |
| 3 | R245fa | Heat source | 100°C | [58] |
| | | Condenser | 27°C | |
| 4 | R227ea | Heat source | 66.8°C-110°C | [70] |
| 5 | HFE7000 | Heat source | 117.8-128.9°C | [71] |
| 6 | SES36 | Heat source | 125°C | [67] |
| | | Cooling glycol water | 14-43°C | |
| 7 | R245fa/R365 (48.5%/51.5%) | Heat source | 100-150°C | [69] |
| 8 | R11 | Heat source | 100°C | [58] |
| | | Evaporation | 70°C | |

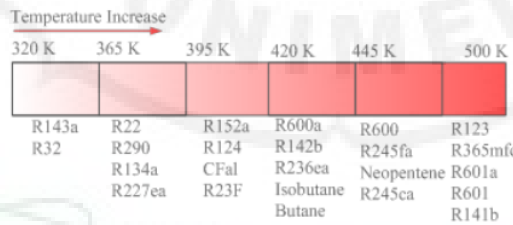


Fig. 3. Working fluids selection hint according to the heat sources temperature [59]

4. System Analysis

Thermodynamic performance analysis of the system proposed is performed based on the characteristic parameters of the selected working fluid and criterion, which refers to the previews researchers used as shown in Table 3. The R134a working fluid was selected to study the system's performance. The thermal properties of the working fluid as a function of the pressure and temperature of each component are used as an input to the thermodynamic performance

equations and correlations related to the system considered. Some technical data and information from the preview articles are used to compare the results of this study.

Table 3

The considered input parameters of the 10 kW_e power system proposed with R134a as the working fluid

| No | Parameter | Units | Value | Ref. |
|----|---|-------|---------------|------------|
| 1 | Smoke temperature, T ₁ | °C | 150-220 | Measured |
| 2 | Hot water temperature | °C | 70-95 | Measured |
| 3 | Organic fluid evaporation temperature, T _{evap} | °C | 60-90 | [60] |
| 4 | Organic fluid evaporation pressure, P _{evap} | bar | 5 | [58,61] |
| 5 | Turbine inlet pressure, P ₈ | bar | 5 | [25,58,62] |
| 6 | Turbine inlet temperature, T ₈ | °C | 60-90 | [25,58] |
| 7 | Turbine inlet temperature, T ₉ | °C | 20-40 | Measured |
| 8 | Turbine inlet pressure, P ₉ | bar | 1-2 | [58] |
| 9 | Organic fluid condensation pressure, P _{con} | bar | 1-2 | [58] |
| 10 | Organic working fluid flow rates, \dot{m}_7 | kg/s | 0.5-1 | [58,63] |
| 11 | Isentropic adiabatic pump and turbine efficiency, $\eta_{p,s}$ and $\eta_{t,s}$ | % | 0.80 and 0.70 | 64] |
| 12 | Pressure ration, P _r | - | 3-7 | Measured |

5. Basic Expression State of the Proposed ORC

The ORC sub-system in the carbonization process is schematically simplified as shown in Figure 4. Each component is assumed as a control volume with the following idealizations; OFE as an isobaric exothermal process, OFC as an isobaric endothermic process, the turbine as an isentropic expansion process, and the OFP as an isentropic compression process.

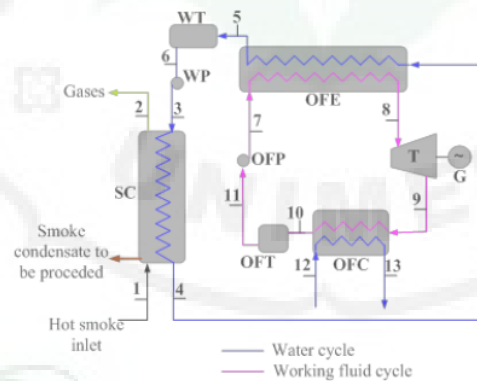


Fig. 4. Schematic flow diagram of the ORC integrated to smoke condensation process

By assuming steady state condition, kinetic and potential changes are ignored, the general principle of continuity, energy rate of change, and exergy rate of change of flow stream at the inlet (i) and exit (e) for each component of the ORC can be expressed according to the Eq. (1) to (3) as follows

$$\sum_i \dot{m}_i - \sum_e \dot{m}_e = \dot{m} \quad (1)$$

$$\frac{dE_{cv}}{dt} = \dot{Q}_{cv} - \dot{W}_{cv} + \sum_i \dot{m}_i h_i - \sum_e \dot{m}_e h_e \quad (2)$$

$$\frac{d\Phi_{cv}}{dt} = \left(1 - \frac{T_0}{T_b}\right) \dot{Q}_{cv} - \dot{W}_{cv} + \sum_i \dot{m}_i \psi_i - \sum_e \dot{m}_e \psi_e - \dot{I}_d \quad (3)$$

Where \dot{m} is the mass flow rate of working fluid, h is the working fluid enthalpy at the specified state, ψ is the specific stream exergy flows at inlet and exit site respectively, T_0 is the dead state temperature where the exergy is zero, T_b is the boundary temperature where the heat transfer to surroundings occurred, \dot{I}_d is the exergy destruction during process. T-s diagram of saturated vapor curve of the organic fluid on the ORC subsystem considered is shown in Figure 5. The carbonization product smoke of high temperature entering the SC, immediately undergoes condensation using water as cooling medium. The hot water from the SC then is utilized to evaporate the hydrocarbon working fluid in the OFE.

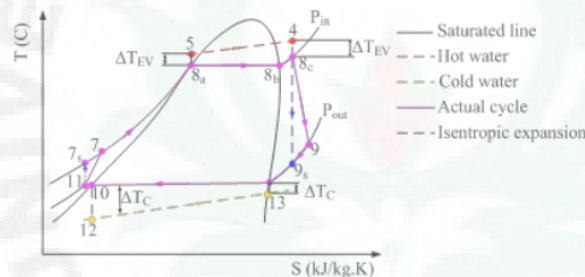


Fig. 5. T-s diagram of the working fluid curve of the designed cycle

5.1 Smoke Condensation (SC)

During smoke condensation, the heat absorbed by the cooling water is assumed as the total heat input to the OFE which is expressed as

$$\dot{Q}_{OFE} = \dot{m}_1 C_{p,sm} (T_1 - T_2) = \dot{m}_3 C_{p,w} (T_4 - T_3) = \dot{m}_3 (h_4 - h_3) \quad (4)$$

5.2 Organic Fluids Evaporation (OFE)

There are two fluid streams entering and living the evaporator; the hot water (hw) as the hot stream and the working fluid (wf) as the cold streams. Assume the heat transfer to the surrounding is ignored and there is no work across the OFE, therefore, mass flow rate ratio in the OFE can be written by solving the energy balance rate equation, Eq. (2) as

$$\frac{\dot{m}_7}{\dot{m}_4} = \frac{(h_4 - h_5)}{(h_{8b} - h_7)} \quad (5)$$

Exergy destruction in the OFE is determined by simplifying and solving Eq. (3) as

$$\dot{I}_{d,OFE} = \dot{m}_4 \dot{X}_{hw} + \dot{m}_7 \dot{X}_{wf} \quad (6)$$

where \dot{X}_{hw} and \dot{X}_{wf} are the exergy rate change of streams in the OFE and are expressed as

$$\dot{X}_{hw} = \dot{m}_4[(h_4 - h_5) - T_0(s_4 - s_5)] \quad (7)$$

$$\dot{X}_{wf} = \dot{m}_7[(h_{8b} - h_7) - T_0(s_{8b} - s_7)] \quad (8)$$

Exergy efficiency of the OFE is written as

$$\eta_{\text{OFE,rev}} = \frac{\dot{X}_{wf}}{\dot{X}_{hw}} \times 100\% \quad (9)$$

5.3 Organic Fluid Condensation (OFC)

Condensation is assumed as an endothermic adiabatic process which rejects heat. Assume the heat transfer to the surrounding is ignored and there is no work across the OFC, therefore, the mass flow rate ratio in the OFE can be written by solving the energy balance rate equation, Eq. (2) as

$$\frac{\dot{m}_9}{\dot{m}_{12}} = \frac{(h_{13} - h_{12})}{(h_{10} - h_9)} \quad (10)$$

Exergy destruction in the OFC is determined by simplifying and solving Eq. (3) as

$$\dot{I}_{\text{d,OFC}} = \dot{m}_9 \dot{X}_{wf} + \dot{m}_{12} \dot{X}_{cw} \quad (11)$$

Where \dot{X}_{wf} and \dot{X}_{cw} are the change exergy rate of streams in the OFC and expressed as

$$\dot{X}_{wf} = \dot{m}_9[(h_9 - h_{10}) - T_0(s_9 - s_{10})] \quad (12)$$

$$\dot{X}_{cw} = \dot{m}_{12}[(h_{12} - h_{13}) - T_0(s_{12} - s_{13})] \quad (13)$$

$$\eta_{\text{OFC,rev}} = \frac{\dot{X}_{cw}}{\dot{X}_{wf}} \times 100\% \quad (14)$$

5.4 Organic Fluid Feed Pump (OFP)

A feed pump is required to increase the liquid form of working fluid pressure to the evaporation pressure. The pump performances expressions are determined after simplifying and solving Eq. (2) and (3) as follows

$$\dot{W}_{\text{OFP,act}} = \dot{m}_7(h_7 - h_{11}) \quad (15)$$

$$\dot{W}_{\text{OFP,s}} = \frac{\dot{m}_7(h_{7s} - h_{11})}{\eta_p} \quad (16)$$

where, h_7 and h_{11} are the working fluid enthalpy in the inlet and outlet of the pump, and h_{7s} is the working fluid enthalpy after the isentropic pressurization process. Pump reversible efficiency can be written as follows

$$\eta_{\text{OFP},s} = \frac{\dot{W}_{\text{OFP,act}}}{\dot{W}_{\text{OFP},s}} \times 100\% \quad (17)$$

$$\dot{I}_{d,\text{OFP}} = \dot{W}_{\text{OFP,rev}} + \dot{m}_7[(h_7 - h_{11}) - T_0(s_7 - s_{11})] \quad (18)$$

$$\dot{W}_{\text{OFP,rev}} = \dot{m}_7[(h_7 - h_{11}) - T_0(s_7 - s_{11})] - \dot{I}_{\text{OFP}} \quad (19)$$

$$\eta_{\text{OFP,rev}} = \frac{\dot{W}_{\text{OFP,act}}}{\dot{W}_{\text{OFP,rev}}} \times 100\% \quad (20)$$

5.5 Turbines

Turbine as an adiabatic isentropic expansion process (state 7-8s) generates energy in the form of shaft work. Work produced (\dot{W}_T) and the turbine performances are expressed by simplify Eq. (2) as

$$\dot{W}_{T,\text{act}} = \dot{m}_{8c}(h_{8c} - h_9) \quad (21)$$

$$\dot{W}_{T,s} = \frac{\dot{m}_{8c}(h_{8c} - h_{9,s})}{\eta_T} \quad (22)$$

$$\eta_{T,s} = \frac{\dot{W}_{T,\text{act}}}{\dot{W}_{T,s}} \times 100\% \quad (23)$$

Maximum power output or reversible power ($\dot{W}_{T,\text{rev}}$) is determined by simplifying Eq. (3) where exergy destruction in the turbine is set to zero due to the turbine reversibility process ($\dot{I}_d = 0$), therefore

$$\dot{W}_{T,\text{rev}} = \dot{m}_{8b}[(h_{8c} - h_9) - T_0(s_{8c} - s_9)] \quad (24)$$

Exergy efficiency of the turbine is determined by

$$\eta_{T,\text{rev}} = \frac{\dot{W}_{T,\text{act}}}{\dot{W}_{T,\text{rev}}} \times 100\% \quad (25)$$

In this system, the net work done by the working fluid or the work output (\dot{W}_{NET}) should be equivalent to the power output from the turbine minus the power consumption by the OFP is written as

$$\dot{W}_{\text{NET}} = \dot{W}_{T,\text{act}} - \dot{W}_{\text{OFP,act}} \quad (26)$$

6. Performances Analysis Expression

Thermal efficiency indicates the extent to which the energy input to the working fluid passing through the OFE subcomponent is converted to the network output. Using the expressions just introduced, the energetic and exergetic efficiencies of the proposed ORC system can be evaluated by using the following expression [39]

$$\eta_{\text{th}} = \frac{\dot{W}_{\text{NET}}}{\dot{Q}_{\text{OFE}}} = \frac{\dot{W}_{T,\text{act}} - \dot{W}_{\text{OFP,act}}}{\dot{Q}_{\text{OFE}}} \times 100\% \quad (27)$$

$$\eta_X = \frac{\dot{W}_{NET}}{\dot{Q}_{OFE} \times \left(1 - \frac{T_0}{T_1}\right) - \dot{Q}_{OFC} \times \left(1 - \frac{T_0}{T_2}\right)} \times 100\% \quad (28)$$

where η_{th} and η_X are the energetic and exergetic efficiencies of the ORC system respectively, \dot{W}_{NET} is the net shaft power output, \dot{Q}_{OFE} is the heat into the OFE, \dot{Q}_{OFC} is the heat rejected in the OFC. T_1 and T_2 are the corresponding input and output smoke temperature. Other important parameters such as the back-work ratio (bwr) as defined the ratio of the pump work input to the work developed by the turbine, the pressure ratio or expansion ratio in the turbine (P_r) are also utilize to quantify the system performance as the following expressions

$$bwr = \frac{W_{P,act}}{W_{T,act}} \quad (29)$$

$$P_r = \frac{P_{T,in}}{P_{T,out}} \quad (30)$$

7. Special Case

Here are some theoretical simulation results using the R143 as working fluid. The properties of this fluid are available on the table. Figure 6 shows the feed pump's required power to achieve the required evaporation pressure, which is determined based on Eq. (15). From the graph, it is known that the higher the output pressure of the feed pump, the higher the input power required, but that it decreases when the input pressure increases. This information will greatly determine the amount of network generated by the system. This power will be supplied by the turbine outlet power, therefore the turbine output should be higher than the feed pump power required.

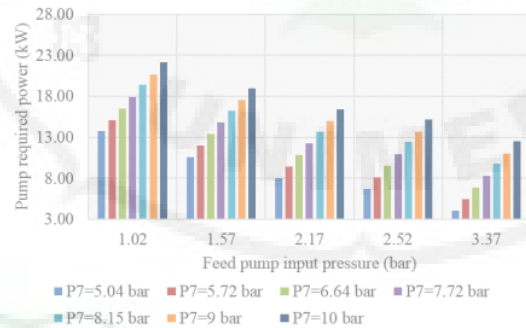


Fig. 6. Pump power required based on input and output pressure

Figure 7 shows the output power calculated by Eq. (21) with respect to the turbine inlet temperature. The output power varies with the outlet temperature of the turbine (T_9). The highest output power is obtained when the temperature difference between the inlet (T_{8c}) and turbine outlet (T_9) is quite high.

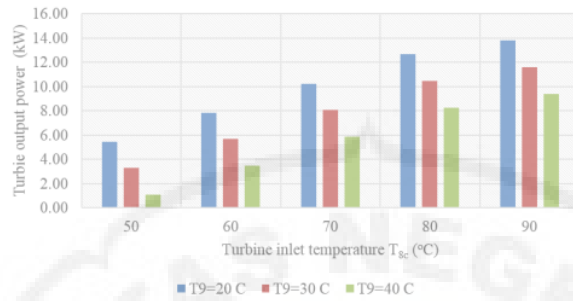


Fig. 7. Effect of turbine inlet temperature on the output power with turbine outlet pressure of 2 bar

Figure 8 shows the output power affected by the turbine outlet pressure (P_9). The greater the pressure outlet of the turbine, the greater the output power obtained. However, the maximum power obtained depends on the ratio of the inlet pressure (P_{8c}) and outlet of the turbine (P_9).

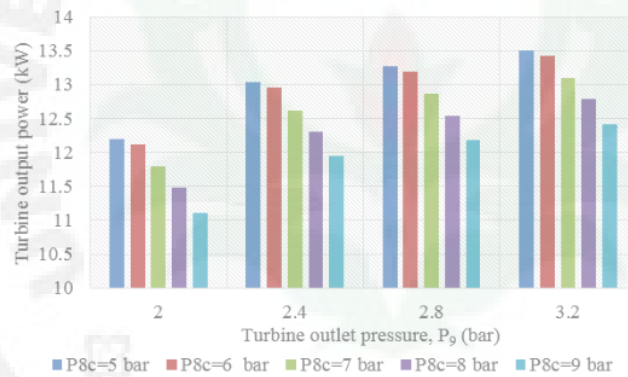


Fig. 8. Effect of turbine outlet pressure on the output power at turbine outlet temperature of 20 °C

Figure 9 shows the output power with respect to the turbine inlet temperature at different turbine inlet pressures (P_{8c}). It is shown that the output power increases with the temperature (T_{8c}). The output power also depends on the turbine input pressure. The higher the inlet pressure and temperature, the greater the output power produced. However, at the same temperature, an increase in inlet pressure causes a decrease in output power. With an inlet temperature of 90 °C, about 14.5 kW of output power can be obtained. This finding is confirmed by Touaibi *et al.*, [63].

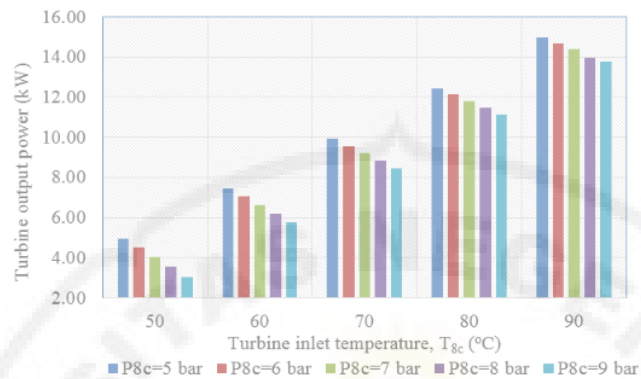


Fig. 9. Effect of turbine inlet temperature on the output power at 20 °C of outlet temperature

8. Discussion and Future Work

In this study, the energy and energy balance equations for the ORC plant powered by thermal energy from biomass carbonization have been briefly expressed. The governing equations of continuity, energy, and energy destruction rate balances have been applied to each subcomponent of the plant, which can be used to predict its thermodynamic performance. The operating temperatures and pressures of the evaporator and condenser are more important than the heat source's temperature. Because the high amount of heat available does not always ensure a high amount of net power output [64]. The most important operating parameter that has a strong influence is the operating pressure.

Several selected operating target parameters were adopted to perform the ORC proposed as described in Table 3. By applying all the parameters together with working fluid characteristics into these expressed equations, the ORC system performance could be predicted and should be comparable with other results of previous researchers. Generally, heat transfer in the evaporator is very sensitive to a change in the temperature and flow rate of the heat source. Increments in heat source temperature and flow rate result in a decrease in working fluid viscosity that has a positive impact on working fluid flow rate through the system. Good heat transfer resulted in the increase of both the turbine isentropic and thermal efficiencies [65]. From this study, it is recommended that the system performance reach optimum performance at turbine inlet pressure of 5 bar and turbine outlet pressure of 2 bar. It is hoped that the performance of the proposed system will be similar or even better compared to the results of previous researchers.

The estimated system performances using energy and energy efficiency analysis were also intended for educational purposes as a unit test for performing experiments on solid biomass combustion for energy production. It is necessary to perform modelling using computer simulation using related software to facilitate preliminary design and development of a real ORC system on a lab-scale basis, so it can then be validated with industrial data. Furthermore, to achieve the highest ORC system performance, the selection of equipment for subcomponents needs to be addressed in the future.

9. Conclusion

Thermal energy, which is regarded as waste heat, can be used to generate small-scale electrical power. A process that involves heat transfer or heat removal will waste thermal energy, as in the condensation process in a condenser. This wasted thermal energy can still be used as electrical power even on a small scale. However, before constructing a power plant system based on ORC, a preliminary thermal analysis is really required to estimate the electrical power that can be obtained and can be very helpful to select the appropriate organic fluid as the working fluid. In contrast to the water-based Rankine system, the ORCs system is really considered the operating parameters (temperature and pressure) at the inlet and outlet. The performance of an ORCs system in a carbonization application is presented in this study. The study focuses on the operating parameters of the plant with the major goal of determining the output power that can be obtained from the operating parameter study. Through the analysis, it is shown that the higher the turbine outlet pressure, the higher the output power obtained. However, this will require additional tools to condense the fluid so that it immediately becomes a liquid. According to this study, about 13 kW of output power can be obtained if the steam temperature can reach 90 °C at a pressure of about 5 Bar. The ORC is well suited to converting wasted thermal energy into electrical power.

Acknowledgements

The presented work is the result and contribution of the project: Development and testing of biomass combustion systems for power generation in remote areas based on the Organic Rankine Cycle, funded by the Universitas Negeri Medan on the Research Development Scheme with Contract Number: 13/UN33.8/PL-PNBP/2020.

References

- [1] Taylor, Gail. "Biofuels and the biorefinery concept." *Energy policy* 36, no. 12 (2008): 4406-4409. <https://doi.org/10.1016/j.enpol.2008.09.069>
- [2] Openshaw, Keith. "Biomass energy: employment generation and its contribution to poverty alleviation." *Biomass and bioenergy* 34, no. 3 (2010): 365-378. <https://doi.org/10.1016/j.biombioe.2009.11.008>
- [3] McKendry, Peter. "Energy production from biomass (part 2): conversion technologies." *Bioresource technology* 83, no. 1 (2002): 47-54. [https://doi.org/10.1016/S0960-8524\(01\)00119-5](https://doi.org/10.1016/S0960-8524(01)00119-5)
- [4] Saxena, R. C., D. K. Adhikari, and H. B. Goyal. "Biomass-based energy fuel through biochemical routes: A review." *Renewable and sustainable energy reviews* 13, no. 1 (2009): 167-178. <https://doi.org/10.1016/j.rser.2007.07.011>
- [5] Panwar, N. L., Richa Kothari, and V. V. Tyagi. "Thermo chemical conversion of biomass—Eco friendly energy routes." *Renewable and Sustainable Energy Reviews* 16, no. 4 (2012): 1801-1816. <https://doi.org/10.1016/j.rser.2012.01.024>
- [6] Simanjuntak, Janter Pangaduan, Samsudin Anis, Mochamad Syamsiro, Eka Daryanto, and Bisrul Hapis Tambunan. "Thermal Energy Storage System from Household Wastes Combustion: System Design and Parameter Study." *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences* 80, no. 2 (2021): 115-126. <https://doi.org/10.37934/arfm.80.2.115126>
- [7] Simanjuntak, Janter P., K. A. Al-attab, and Z. A. Zainal. "Hydrodynamic Flow Characteristics in an Internally Circulating Fluidized Bed Gasifier." *Journal of Energy Resources Technology* 141, no. 3 (2019). <https://doi.org/10.1115/1.4041092>
- [8] Simanjuntak, Janter P., and Z. A. Zainal. "Experimental study and characterization of a two-compartment cylindrical internally circulating fluidized bed gasifier." *Biomass and bioenergy* 77, (2015): 147-154. <https://doi.org/10.1016/j.biombioe.2015.03.023>
- [9] Simanjuntak, Janter P., Eka Daryanto, and Bisrul Hapis Tambunan. "Producer gas production of Indonesian biomass in fixed-bed downdraft gasifier as an alternative fuels for internal combustion engines." In *Journal of Physics: Conference Series*, vol. 970, no. 1, p. 012019. IOP Publishing, 2018. <https://doi.org/10.1088/1742-6596/970/1/012019>

- [10] Suresh, R., V. K. Singh, J. K. Malik, A. Datta, and R. C. Pal. "Evaluation of the performance of improved biomass cooking stoves with different solid biomass fuel types." *biomass and bioenergy* 95 (2016): 27-34. <https://doi.org/10.1016/j.biombioe.2016.08.002>
- [11] Simanjuntak, J. P., E. Daryanto, and B. H. Tambunan. "Performance improvement of biomass combustion-based stove by implementing internally air-distribution." In *Journal of Physics: Conference Series*, vol. 1811, no. 1, 12015. IOP Publishing, 2021. <https://doi.org/10.1088/1742-6596/1811/1/012015>
- [12] Al-Attab, Khaled A., and Z. A. Zainal. "Externally fired gas turbine technology: A review." *Applied Energy* 138 (2015): 474-487. <https://doi.org/10.1016/j.apenergy.2014.10.049>
- [13] Heywood, John B. "Ignition Delay." *Internal Combustion Engine Fundamentals, Second Edition* (2018).
- [14] Gupta, Harsh K., and Sukanta Roy. *Geothermal energy: an alternative resource for the 21st century*. Elsevier, 2006.
- [15] Liu, Hao, Yingjuan Shao, and Jinxing Li. "A biomass-fired micro-scale CHP system with organic Rankine cycle (ORC)—Thermodynamic modelling studies." *Biomass and Bioenergy* 35, no. 9 (2011): 3985-3994. <https://doi.org/10.1016/j.biombioe.2011.06.025>
- [16] Peris, Bernardo, Joaquín Navarro-Esbrí, Francisco Molés, Manuel González, and Adrián Mota-Babiloni. "Experimental characterization of an ORC (organic Rankine cycle) for power and CHP (combined heat and power) applications from low grade heat sources." *Energy* 82 (2015): 269-276.
- [17] Mascuch, Jakob, Vaclav Novotny, Vaclav Vodicka, Jan Spale, and Zbynek Zeleny. "Experimental development of a kilowatt-scale biomass fired micro-CHP unit based on ORC with rotary vane expander." *Renewable Energy* 147 (2020): 2882-2895.
- [18] Peris, Bernardo, Joaquín Navarro-Esbrí, Francisco Molés, and Adrián Mota-Babiloni. "Experimental study of an ORC (organic Rankine cycle) for low grade waste heat recovery in a ceramic industry." *Energy* 85 (2015): 534-542. <https://doi.org/10.1016/j.energy.2015.03.065>
- [19] Zhang, Hong-Hu, Huan Xi, Ya-Ling He, Yu-Wen Zhang, and Bo Ning. "Experimental study of the organic rankine cycle under different heat and cooling conditions." *Energy* 180 (2019): 678-688. <https://doi.org/10.1016/j.energy.2019.05.072>
- [20] Cho, Soo-Yong, and Chong-Hyun Cho. "An experimental study on the organic Rankine cycle to determine as to how efficiently utilize fluctuating thermal energy." *Renewable Energy* 80 (2015): 73-79. <https://doi.org/10.1016/j.renene.2015.01.066>
- [21] Rahbar, Kiyarash, Saad Mahmoud, Raya K. Al-Dadah, Nima Moazami, and David Ashmore. "Feasibility study of power generation through waste heat recovery of wood burning stove using the ORC technology." *Sustainable cities and society* 36 (2017): 594-614.
- [22] Peris, Bernardo, Joaquín Navarro-Esbrí, Francisco Molés, Roberto Collado, and Adrián Mota-Babiloni. "Performance evaluation of an Organic Rankine Cycle (ORC) for power applications from low grade heat sources." *Applied Thermal Engineering* 75 (2015): 763-769. <https://doi.org/10.1016/j.applthermaleng.2014.10.034>
- [23] M. J. Moran, et al. *Fundamentals of engineering thermodynamics*: John Wiley & Sons, 2010.
- [24] Quoilin, Sylvain, Martijn Van Den Broek, Sébastien Declaye, Pierre Dewallef, and Vincent Lemort. "Techno-economic survey of Organic Rankine Cycle (ORC) systems." *Renewable and sustainable energy reviews* 22 (2013): 168-186. <https://doi.org/10.1016/j.rser.2013.01.028>
- [25] Peris, Bernardo, Joaquín Navarro-Esbrí, Francisco Molés, Jose Pascual Martí, and Adrián Mota-Babiloni. "Experimental characterization of an Organic Rankine Cycle (ORC) for micro-scale CHP applications." *Applied Thermal Engineering* 79 (2015): 1-8. <https://doi.org/10.1016/j.applthermaleng.2015.01.020>
- [26] Ismail, H., A. A. Aziz, R. A. Rasih, N. Jenal, Z. Michael, and Azmi Roslan. "Performance of organic Rankine cycle using biomass as source of fuel." *Journal of Advanced Research in Applied Sciences and Engineering Technology* 4, no. 1 (2016): 29-46.
- [27] Hung, Tzu-Chen, T. Y. Shai, and S. Kong Wang. "A review of organic Rankine cycles (ORCs) for the recovery of low-grade waste heat." *Energy* 22, no. 7 (1997): 661-667. [https://doi.org/10.1016/S0360-5442\(96\)00165-X](https://doi.org/10.1016/S0360-5442(96)00165-X)
- [28] Maizza, V., and A. Maizza. "Unconventional working fluids in organic Rankine-cycles for waste energy recovery systems." *Applied thermal engineering* 21, no. 3 (2001): 381-390. [https://doi.org/10.1016/S1359-4311\(00\)00044-4](https://doi.org/10.1016/S1359-4311(00)00044-4)
- [29] Maizza, V., and A. Maizza. "Working fluids in non-steady flows for waste energy recovery systems." *Applied Thermal Engineering* 16, no. 7 (1996): 579-590. [https://doi.org/10.1016/1359-4311\(95\)00044-5](https://doi.org/10.1016/1359-4311(95)00044-5)
- [30] Liu, Bo-Tau, Kuo-Hsiang Chien, and Chi-Chuan Wang. "Effect of working fluids on organic Rankine cycle for waste heat recovery." *Energy* 29, no. 8 (2004): 1207-1217. <https://doi.org/10.1016/j.energy.2004.01.004>
- [31] Hung, Tzu-Chen. "Waste heat recovery of organic Rankine cycle using dry fluids." *Energy Conversion and management* 42, no. 5 (2001): 539-553. [https://doi.org/10.1016/S0196-8904\(00\)00081-9](https://doi.org/10.1016/S0196-8904(00)00081-9)

- [32] Saleh, Bahaa, Gerald Koglbauer, Martin Wendland, and Johann Fischer. "Working fluids for low-temperature organic Rankine cycles." *Energy* 32, no. 7 (2007): 1210-1221. <https://doi.org/10.1016/j.energy.2006.07.001>
- [33] Li, Jing, Gang Pei, Yunzhu Li, Dongyue Wang, and Jie Ji. "Energetic and exergetic investigation of an organic Rankine cycle at different heat source temperatures." *Energy* 38, no. 1 (2012): 85-95. <https://doi.org/10.1016/j.energy.2011.12.032>
- [34] Li, You-Rong, Jian-Ning Wang, and Mei-Tang Du. "Influence of coupled pinch point temperature difference and evaporation temperature on performance of organic Rankine cycle." *Energy* 42, no. 1 (2012): 503-509. <https://doi.org/10.1016/j.energy.2012.03.018>
- [35] Uusitalo, Antti, Teemu Turunen-Saaresti, Juha Honkatukia, and Radheesh Dhanasegaran. "Experimental study of small scale and high expansion ratio ORC for recovering high temperature waste heat." *Energy* 208 (2020): 118321. <https://doi.org/10.1016/j.energy.2020.118321>
- [36] He, Maogang, Xinxin Zhang, Ke Zeng, and Ke Gao. "A combined thermodynamic cycle used for waste heat recovery of internal combustion engine." *Energy* 36, no. 12 (2011): 6821-6829. <https://doi.org/10.1016/j.energy.2011.10.014>
- [37] Shu, Gequn, Jian Zhao, Hua Tian, Xingyu Liang, and Haiqiao Wei. "Parametric and exergetic analysis of waste heat recovery system based on thermoelectric generator and organic rankine cycle utilizing R123." *Energy* 45, no. 1 (2012): 805-816. <https://doi.org/10.1016/j.energy.2012.07.010>
- [38] Wang, E. H., H. G. Zhang, B. Y. Fan, M. G. Ouyang, Y. Zhao, and Q. H. Mu. "Study of working fluid selection of organic Rankine cycle (ORC) for engine waste heat recovery." *Energy* 36, no. 5 (2011): 3406-3418. <https://doi.org/10.1016/j.energy.2011.03.041>
- [39] Wu, Di, Zhijian Liu, Zhonghe Han, Han Zhang, Fanfan Ma, Shicong Zhang, Xinyan Yang, and Hua Ge. "Thermodynamic performance analyses and collaborative optimization for a novel integrated energy system coupled with organic Rankine cycle." *Energy Conversion and Management* 225 (2020): 113484. <https://doi.org/10.1016/j.enconman.2020.113484>
- [40] Islam, Salmah Md Saiful, and Syamimi Saadon. "Performance Analysis of Supercritical Organic Rankine Cycle System with Different Heat Exchangers Design Configuration." *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences* 65, no. 2 (2020): 324-333.
- [41] Saadon, Syamimi, and Nur Athirah Mohd Nasir. "Modelling and Thermal Analysis of Organic Rankine Cycle with Superheater and Preheater." *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences* 55, no. 2 (2019): 142-149.
- [42] Pantaleo, Antonio Marco, Sergio Camporeale, and Bernardo Fortunato. "Small scale biomass CHP: Techno-economic performance of steam vs gas turbines with bottoming ORC." *Energy Procedia* 82 (2015): 825-832. <https://doi.org/10.1016/j.egypro.2015.11.819>
- [43] Tchanche, Bertrand Fankam, George Papadakis, Gregory Lambrinos, and Antonios Frangoudakis. "Fluid selection for a low-temperature solar organic Rankine cycle." *Applied Thermal Engineering* 29, no. 11-12 (2009): 2468-2476. <https://doi.org/10.1016/j.applthermaleng.2008.12.025>
- [44] Hung, T. C., S. K. Wang, C. H. Kuo, B. S. Pei, and K. F. Tsai. "A study of organic working fluids on system efficiency of an ORC using low-grade energy sources." *Energy* 35, no. 3 (2010): 1403-1411. <https://doi.org/10.1016/j.energy.2009.11.025>
- [45] Roupedakis, Tryfon C., George Loumpardis, Evropi Monokrousou, Konstantinos Braimakis, Antonios Charalampidis, and Sotirios Karellas. "Exergetic and economic analysis of a solar driven small scale ORC." *Renewable Energy* 157 (2020): 1008-1024. <https://doi.org/10.1016/j.renene.2020.05.016>
- [46] Petrollese, Mario, and Daniele Cocco. "Robust optimization for the preliminary design of solar organic Rankine cycle (ORC) systems." *Energy Conversion and Management* 184 (2019): 338-349.
- [47] Vittorini, Diego, Alessio Antonini, Roberto Cipollone, Roberto Carapellucci, and Carlo Villante. "Solar Thermal-Based ORC Power Plant for Micro Cogeneration—Performance Analysis and Control Strategy." *Energy Procedia* 148 (2018): 774-781. <https://doi.org/10.1016/j.egypro.2018.08.133>
- [48] Dijoux, Alexandre, Frantz Sinama, Olivier Marc, and Jean Castaing-Lasvignottes. "Modelling and experimentation of heat exchangers for Ocean Thermal Energy Conversion during transient operation." *Procedia Manufacturing* 35 (2019): 298-303. <https://doi.org/10.1016/j.promfg.2019.05.043>
- [49] Vélez, Fredy. "Selecting working fluids in an organic Rankine cycle for power generation from low temperature heat sources." *Dyna* 81, no. 188 (2014): 173-180. <https://doi.org/10.15446/dyna.v81n188.41666>
- [50] Carraro, Gianluca, Viola Bori, Andrea Lazaretto, Giuseppe Toniato, and Piero Danieli. "Experimental investigation of an innovative biomass-fired micro-ORC system for cogeneration applications." *Renewable Energy* 161 (2020): 1226-1243. <https://doi.org/10.1016/j.renene.2020.07.012>
- [51] Cao, Yan, Leonardus WW Mihardjo, Mahidzal Dahari, and Iskander Tlili. "Waste heat from a biomass fueled gas turbine for power generation via an ORC or compressor inlet cooling via an absorption refrigeration cycle: A

- thermoeconomic comparison." *Applied Thermal Engineering* 182 (2021): 116117. <https://doi.org/10.1016/j.applthermaleng.2020.116117>
- [52] Algieri, Angelo. "Comparative investigation of the performances of subcritical and transcritical biomass-fired orc systems for micro-scale chp applications." *Procedia Computer Science* 83 (2016): 855-862. <https://doi.org/10.1016/j.procs.2016.04.176>
- [53] Mascuch, Jakub, Vaclav Novotny, Vaclav Vodicka, Jan Spale, and Zbynek Zeleny. "Experimental development of a kilowatt-scale biomass fired micro-CHP unit based on ORC with rotary vane expander." *Renewable Energy* 147 (2020): 2882-2895. <https://doi.org/10.1016/j.renene.2018.08.113>
- [54] Macchi, Ennio, and Marco Astolfi, eds. *Organic rankine cycle (ORC) power systems: technologies and applications*. Woodhead Publishing, 2016.
- [55] Invernizzi, Costante, Paolo Iora, and Paolo Silva. "Bottoming micro-Rankine cycles for micro-gas turbines." *Applied thermal engineering* 27, no. 1 (2007): 100-110. <https://doi.org/10.1016/j.applthermaleng.2006.05.003>
- [56] Chacartegui, R., D. Sánchez, J. M. Muñoz, and T. Sánchez. "Alternative ORC bottoming cycles for combined cycle power plants." *Applied Energy* 86, no. 10 (2009): 2162-2170. <https://doi.org/10.1016/j.apenergy.2009.02.016>
- [57] C. Carcasci, et al., "Thermodynamic analysis of an organic Rankine cycle for waste heat recovery from gas turbines," *Energy*, vol. 65, pp. 91-100, 2014/02/01/ 2014. <https://doi.org/10.1016/j.energy.2013.11.080>
- [58] Brown, Robert C., ed. *Thermochemical processing of biomass: conversion into fuels, chemicals and power*. John Wiley & Sons, 2019. <https://doi.org/10.1002/9781119417637>
- [59] Quoilin, Sylvain, Sébastien Declaye, Bertrand F. Tchanche, and Vincent Lemort. "Thermo-economic optimization of waste heat recovery Organic Rankine Cycles." *Applied thermal engineering* 31, no. 14-15 (2011): 2885-2893. <https://doi.org/10.1016/j.applthermaleng.2011.05.044>
- [60] Morrone, Pietropaolo, Angelo Algieri, and Teresa Castiglione. "Hybridisation of biomass and concentrated solar power systems in transcritical organic Rankine cycles: A micro combined heat and power application." *Energy conversion and management* 180 (2019): 757-768. <https://doi.org/10.1016/j.enconman.2018.11.029>
- [61] Ambarita, H., and H. V. Sihombing. "Evaluation of working fluids for organic Rankine cycle power plant with Aspen plus." In *Journal of Physics: Conference Series*, vol. 1566, no. 1, p. 012042. IOP Publishing, 2020. <https://doi.org/10.1088/1742-6596/1566/1/012042>
- [62] Wang, Dongxiang, Xiang Ling, Hao Peng, Lin Liu, and LanLan Tao. "Efficiency and optimal performance evaluation of organic Rankine cycle for low grade waste heat power generation." *Energy* 50 (2013): 343-352. <https://doi.org/10.1016/j.energy.2012.11.010>
- [63] Touaibi, Rabah, Hasan Köten, Michel Feidt, and Ozlem Boydak. "Investigation of three organic fluids effects on exergy analysis of a combined cycle: organic Rankine cycle/vapor compression refrigeration." *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences* 52, no. 2 (2018): 232-245.
- [64] Ozahi, E., A. Tozlu, and Ayşegül Abusoglu. "Thermodynamic performance assessment of different fluids in a typical organic Rankine cycle for usage in municipal solid waste power plant." (2017). <https://doi.org/10.12693/APhysPolA.132.807>
- [65] Shao, Long, Jie Zhu, Xiangrui Meng, Xinli Wei, and Xinling Ma. "Experimental study of an organic Rankine cycle system with radial inflow turbine and R123." *Applied Thermal Engineering* 124 (2017): 940-947. <https://doi.org/10.1016/j.applthermaleng.2017.06.042>

3-Development of a

ORIGINALITY REPORT

16%

SIMILARITY INDEX

19%

INTERNET SOURCES

15%

PUBLICATIONS

13%

STUDENT PAPERS

PRIMARY SOURCES

| | | |
|---|--|----|
| 1 | Submitted to Politeknik Negeri Bandung Student Paper | 3% |
| 2 | Submitted to Universitas Negeri Medan Student Paper | 2% |
| 3 | baixardoc.com Internet Source | 1% |
| 4 | Angelo Algieri, Pietropaolo Morrone. "Thermo-economic Investigation of Solar-Biomass Hybrid Cogeneration Systems based on Small-Scale Transcritical Organic Rankine Cycles", Applied Thermal Engineering, 2022 Publication | 1% |
| 5 | Submitted to Pandit Deendayal Petroleum University Student Paper | 1% |
| 6 | tesisenred.net Internet Source | 1% |
| 7 | Dongxiang Wang, Xiang Ling, Hao Peng. "Cost-effectiveness performance analysis of organic Rankine cycle for low grade heat utilization | 1% |

coupling with operation condition", Applied Thermal Engineering, 2013

Publication

| | | |
|----|---|-----|
| 8 | www.ksfmjournal.org Internet Source | 1 % |
| 9 | openresearch.lsbu.ac.uk Internet Source | 1 % |
| 10 | dergipark.org.tr Internet Source | 1 % |
| 11 | library.pdpu.ac.in:8080 Internet Source | 1 % |
| 12 | ruc.udc.es Internet Source | 1 % |
| 13 | lib.unnes.ac.id Internet Source | 1 % |
| 14 | dspace.lib.cranfield.ac.uk Internet Source | 1 % |
| 15 | Md. Zahir Hossain, Hazlee Azil Illias. "Combined binary and gasifier-based power generation from biomass and biowaste in Malaysia", Journal of Renewable and Sustainable Energy, 2023 Publication | 1 % |
| 16 | e-spacio.uned.es Internet Source | 1 % |

Exclude quotes Off

Exclude matches < 1%

Exclude bibliography Off



THE
Character Building
UNIVERSITY