

The logo of Universitas Negeri Medan (UNIMED) is a circular emblem. It features a central sun with rays, a green plant with leaves, and a white bird-like figure. The text "UNIVERSITAS NEGERI MEDAN" is written in a semi-circle at the top, and "UNIMED" is written at the bottom. There are two small square symbols on either side of the bottom text.

5-Potential of Pyrolytic

by Ps 5-janter

The logo for "The Character Building University" features the words "THE Character Building UNIVERSITY" in a mix of serif and cursive fonts. "THE" and "UNIVERSITY" are in a simple serif font, while "Character Building" is in a large, elegant cursive script.

THE
Character Building
UNIVERSITY


Submission date: 24-Mar-2023 04:17PM (UTC+0700)

Submission ID: 2045279918

File name: donesia_A_Mini_Review_to_Fill_the_Gap_of_the_Future_Research.pdf (603.45K)

Word count: 6380

Character count: 35274



Potential of Pyrolytic Oil from Plastic Waste as an Alternative Fuel Through Thermal Cracking in Indonesia: A Mini Review to Fill the Gap of the Future Research

Janter Pangaduan Simanjuntak^{1,*}, Bisrul Hapis Tambunan¹, Junifa Layla Sihombing²

Article history:

Received 12 September 2022

Received in revised form 27 December 2022

Accepted 5 January 2023

Available online 26 January 2023

Keywords:

Plastic waste; pyrolysis process; pyrolytic oil

This article aims to review the potential and feasibility of pyrolytic oil from plastic waste (POPW) as a substitution fuel for conventional fossil fuels. Pyrolytic oil can be generated from plastic waste through the thermal cracking process. In addition to overcoming the global plastic waste problem, recovering plastic waste into alternative fuels can also reduce the consumption of fossil-based fuels. The research on POPW production and utilization of internal combustion engines (ICE) was reviewed and discussed to determine their potential and suitability for fuel substitution. Currently, plastic materials can be easily found in various product packaging, ranging from food and beverage packaging to shopping bags and appliances. When they are no longer utilized, this plastic becomes garbage and will be very harmful to humans and the environment. Therefore, it needs a correct way to proceed and minimize the impact caused by plastic waste. In fact, there are seven types of plastic waste in the polymer groups that must be handled via the pyrolysis process to avoid plastic pollution. literature survey, research on POPW via the pyrolysis process, and its usage is thoroughly found to be booming and growing very rapidly. Co-pyrolysis is known to be the most potential and suitable way to produce high-quality POPW, which is suitable to be used to fuel the ICE and also the stationary industrial engine.

1. Introduction

Indonesia is one of the countries that deal with waste. Especially for the city of Medan with a waste product of nearly 2000 tons/day. When compared to Malaysia with a waste production of 49,670 t/day, Indonesia is a country with high waste production. Until now, the most preferred waste management is to throw it in a landfill. Both Indonesia and Malaysia consider this method to be the most cost-effective with a low level of pollution compared to the pollution caused by coal-fired power plants [1]. Of the total waste generated, plastic waste is the most.

* Corresponding author.

E-mail address: janterps@unimed.ac.id<https://doi.org/10.37934/arfmts.102.2.196207>

The utilization of plastic materials globally continues to grow because it has many advantages compared to other materials [2]. As a result, about 300 million tons of plastic are produced every year [3]. As a developing country, also uses lots of plastics, such as in the industrial sector, health, hospitality, and general use by the public. In the health sector, the use of plastic materials is very dominant. As evidenced during the COVID-19 pandemic, global medical waste made from plastic reached approximately 20.5 million tons [4]. After use, these materials are generally wasted as garbage, may be arbitrary or become an embarrassment in landfills, and frequently end up in the sea as marine debris, causing significant problems for marine organisms [5].

Indonesia, like the rest of the world, was dealing with a serious plastic waste problem. Reporting from several sources indicates that waste generation in Indonesia reaches 64 million tons per year, as much as 15% of which is plastic waste, and 5% is unprocessed and wasted in the sea. According to additional data, Indonesia produces 4.82 billion plastic bottles year and up to 10 billion plastic bags annually, or up to 85,000 tons of plastic bags, which are then released into the environment. This number puts Indonesia in second place as the country with the largest amount of plastic pollution in the sea after China [6]. This condition is getting worse due to the import of plastic waste required for industrial needs, where plastic waste imports in 2018 reached 320 thousand tons, an increase of up to 150% from the previous year. As a result, pollution due to plastic in Indonesia has increased and the quality of the environment will be threatened.

Due to undeveloped knowledge and technology, the handling of plastic waste has become very slow. If not handled properly, it is predicted that plastic waste in Indonesia will reach 12 billion tons by 2050. Evidently, the research proved that the waste that ends up in the sea is mostly plastic waste [7]. Another study conducted in 2019 also stated that of the total waste of 9 major cities studied in Indonesia, 14.6% was plastic waste [8].

In Indonesia, efforts to reduce the impact of plastic waste are still dominated by the 3R; reducing imports and plastic production; reuse, and recycling to be used as products of economic value. PT. Veolia Services Indonesia is a PET-type plastic recycling industry with a 25,000 tons/year capacity. This industry was built on the mandate of Law Number 3 of 2014 concerning Industry [9] and implemented through Government Regulation Number 14 of 2015 concerning the National Industrial Development Master Plan (RIPIN) of 2015–2035.

Waste processing in both household and industries are expected to be able to strengthen the implementation of the circular economy, which has just been implemented in Indonesia as has been done by Germany [10]. The principle of a circular economy is the reuse of residual consumer goods to maximize economic value to zero waste [11-12] and can support the government's efforts to overcome the problem of plastic waste in the sea by up to 70% by 2025. A theory related to the treatment of waste through combustion, where the thermal energy obtained can be stored for household hot water purposes [13]. According to research conducted by Nursyuhada *et al.*, [14] the method of burning waste is the most superior in waste management. However, this method only proceeds a small part of the amount of waste; most of it, including plastic waste, is still wasted, having a significant negative environmental impact.

Several countries in the world have tried to make plastic waste more valuable than throwing it into landfills or burning it to produce thermal energy because plastic has a low heating value similar to petroleum and even greater than coal. However, pollution and emissions that arise must be taken into account because plastic materials have more toxic content than fossil fuels and biomass, so that plastic combustion can be one of the treatment options for plastic waste [15]. A study reported that thermal energy of 6,348 kW/kg could be obtained from plastic waste through combustion [16]. However, during combustion, especially of PVC-type plastic, it also emits harmful substances into the

air, such as carbon monoxide, dioxins and furans, volatiles, and other particles that are very dangerous for humans and the environment [17].

The pyrolysis method is currently the most effective way to manage plastic trash since it may generate chemicals and crude oil instead of thermal energy [18]. Furthermore, current energy availability has begun to cause concern because it is still dependent on fossil fuel energy sources and is anticipated to be unable to full fill energy needs in the future. Therefore, the exploration and exploitation of alternative energy sources are urgently needed immediately. In addition to renewable energy sources, converting plastic waste into fuel has the potential to be a significant solution since it can simultaneously address the issue of plastic waste volume and the issue of energy supply.

Globally, the production and utilization of plastics will increase due to their superior characteristics, such as: being lightweight, easy to use, low production costs, corrosion resistance, and also long service life [19]. Various kinds of necessities, ranging from packaging bottles, packaging bags, household appliances, including eating and drinking utensils, and various other items, are made of plastic-based materials. However, after utilization is completed, these things become useless and are usually thrown away as garbage. Slowly but surely, the plastic waste that accumulates over time will become a very serious problem and threaten human civilization in this world. Plastic will become a tough enemy of the world because it takes a very long time to decompose naturally compared to organic matter.

Plastic waste is included in the category of non-biodegradable waste which causes very chronic environmental problems [11] and takes 500 years to decompose [20]. Therefore, an appropriate solution is needed to turn plastic waste into something more useful than throwing it into a landfill. Plastic waste actually has a high potential economic value if it is processed properly. Then the accumulation and environmental pollution can be reduced. Plastic can be processed into more valuable things, one of which is to become an alternative fuel as a substitute for the main fuel [21].

This study was raised based on the facts, which require appropriate solutions and handling related to crucial problems caused by plastic waste. Relevant sources, literature reviews, and studies of previous research that have been carried out by researchers underlie the efforts of the research team to find the solutions that contribute to solving the waste problem in Indonesia. Utilization of plastic-based liquid fuels cannot necessarily be implemented, so the potential and feasibility of the fuel must be assessed or at least reviewed from the results of research that has been widely carried out. The following should be studied, such as; environmental issues, social acceptance, waste problems, feedstock, ergo environmental, economic development, and product commercialization [21-22].

There have been numerous initiatives to create alternative energy from plastic garbage. However, none of them became a reality and contributed to the provision of additional energy for national energy. Similar to fuels based on fossil materials, fuels made from plastic also have a heating value, almost the same as fossil fuels. The type of plastic and physical properties of liquid fuel that will be used in certain uses for machinery or other equipment must be known ahead of time in order to achieve optimal combustion results [23-24].



The objective of this article is to explore the literature related to the generation of crude plastic oil by the pyrolysis method and its application to the internal combustion engine. Data and information related to the technology and quality of crude oil produced will be used for the initiation of processing pyrolysis-clean plastic waste. It is hoped that the implications of this study can provide input on whether waste processing is feasible with the pyrolysis method, which has the implications of solving the problem of environmental pollution due to plastic waste and its products can reduce dependence on the main energy source, namely fuel sourced from fossils.

27
2. Literature Review
2.1 Plastic

In this section, a number of research findings are presented as possible and discussed in relation to efforts to produce bio-oil plastics. Plastics are known as polymers, formed due to the bonding between hundreds to thousands of monomers that began to be produced in the 1950s. In addition to low prices, this material can be used in various fields, so its development is very rapid. In 2015, global production reached 380 Mt/year [25]. The thermoplastic group of plastics, which includes polyethylene terephthalate (PET), high, low, and linear low-density polyethylene (HDPE, LDPE, and LLDPE), polyvinyl chloride (PVC), polypropylene (PP), and polystyrene (PS), is the most commonly used type of plastic.

Actually, not all plastic can be recycled, so coding is done on the packaging to find out the identity of the plastic. In 1988, the Society of Plastic Industry (SPI) in the United States released the code. Seven RIC (Resin Identification Code) codes were issued by SPI. after receiving ISO approval (International Organization for Standardization), the 7 codes must be included in the form of a symbol on every product that uses plastic materials, including products originating from Indonesia. Table 1 shows the polymer groups and examples of commercial plastics. This code will help in terms of collection and sorting, types of plastic, examples of commercial items made from plastic, and processes that can be carried out in handling plastic waste. In general, the pyrolysis method can convert all types of thermoplastics into liquid oil [26-30].

Table 1
Polymer groups and commercial plastic

Polymer groups	Commercial plastic
 Polyethylene terephthalate	Water bottles, soda bottles, soft drink bottles, shampoo bottles, wash mouth bottles, and peanut bottle jars
 High-density polyethylene	Milk, water, and juice bottles, detergent bottles, yogurt and margarine tubs, grocery bags, shampoo bottles, cereal box liners
 Polyvinyl chloride	Plumbing pipes, clear food packaging, shrink wrap, plastic children's toy, tablecloths, vinyl flooring, and blister packs
 Low-density polyethylene	Brad bags, frozen food bags, dry cleaning bags, newspaper bags, produce bags, paper milk cartoons, and hot/cold beverage cups
 Polypropylene	Ketchup bottles, yogurt and margarine containers, furniture, luggage, and winter clothing insulation
 Polystyrene	Toys, rigid packaging, refrigerator trays, CD cases, take-out containers, cups/plates, and packing chips
 Bioplastic	Polycarbonates, nylon, acrylic, CD, baby bottle, and headlight lens

2.2 Bio-Oil Plastic Production

Figure 1 shows the current state of plastic waste management trends. Landfilling is usually the last effort where plastic waste that is no longer valuable is disposed of a landfill. Recovering is generally defined as processing plastic waste with a thermal process to produce liquid fuel. Unlike Indonesia, European countries process their plastic waste into fuel oil, which is categorized as secondary fuel through a thermal recovery process. Denmark and Switzerland are the two countries that process plastic waste into oil. Almost all plastic waste is converted into fuel [31].



Fig. 1. Plastic waste treatment hierarchy

The Indonesian government continues to encourage activities related to the research and development of plastic waste into alternative fuels so that it is worthy of being a source of energy for the community and industry or providing fuel to internal combustion engines. Using the findings of the analysis of the immediate and long-term effects of the type of plastic, it was found from Table 2 that plastic contains an average volatile content of 96.69% wt., so the recovery process with the pyrolysis method will have the potential to be carried out to obtain liquid oil.

Table 2
 Proximate and ultimate analysis of the thermoplastic [32]

Type of Plastic	Moisture (%Wt)	Fixed Carbon (%Wt)	Volatile (%Wt)	Ash (%Wt)
PET	0.535	10.47	89.29	0.01
HDPE	0	0.02	99.19	0.79
PVC	0.77	5.745	94.26	0
LDPE	0.3	0	99.65	0.2
PP	0.165	0.69	96.46	2.77
PS	0.274	0.16	99.56	0
Other	0.065	1.18	98.42	0.5

The origin of plastic material is also made from fossils, so it can be restored to its original form by decomposition or pyrolysis. Plastic is very sensitive to temperature, so it is easy to decompose as desired. Pyrolysis, therefore, comes with a very precise and seeded process to convert plastic waste back into raw fuel [33]. Pyrolysis is one of the thermochemical methods, which is a process with a high temperature without the use of oxygen, which is usually within the temperature range of 250–500 °C and can be used to decompose or convert hydrocarbon-based materials into light molecules [34]. To obtain high-quality pyrolytic oil from plastic waste (POPW), a high pyrolysis temperature of up to 900 °C is sometimes required. Products from plastic pyrolysis come in the form of crude oil that contains many fuel kinds, including diesel and gasoline [35]. The yields and quality of the POPW must meet the fuel standards required by internal combustion engines, especially the physical character

and energy content possessed. Matters which are directly related to the amount of production and quality of POPW are briefly described in Figure 2 below.

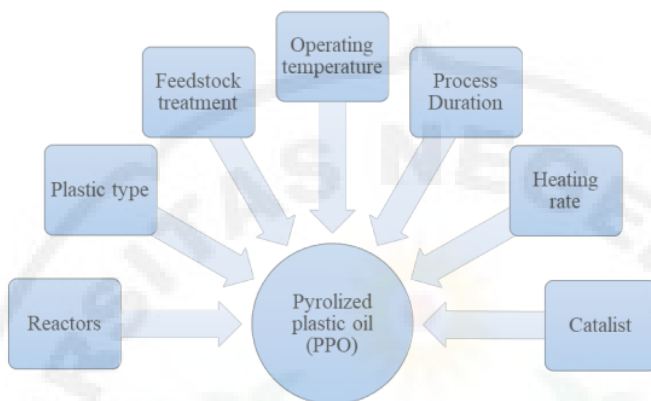


Fig. 2. Parameters related to the POPW production quality

There are seven decisive parameters in producing crude oil from plastic waste. In this section, it is discussed the most difficult parameters to control, which are known through the number of recent studies that have been conducted. According to the heating methods, the different types of reactors that can be utilized for the pyrolysis process are fluidized beds, fixed beds, spouted beds, rotating kilns, or packed beds [35-36]. Each type of reactor has benefits and drawbacks. One of the essentials for the pyrolysis process is high heat transfer rates. The fluid bed reactor has the most potential as shown in Figure 3 because it is known to have good hydrodynamic flow. Using heat carrier materials such as sand so that the heat transfer and distribution are better [37]. In addition, the fluidized bed reactor can be scaled to an industrial scale [38]. Whereas, the packed bed reactor also has high performance when the hydrodynamic flow of combustion air is made more evenly distributed [39-40].

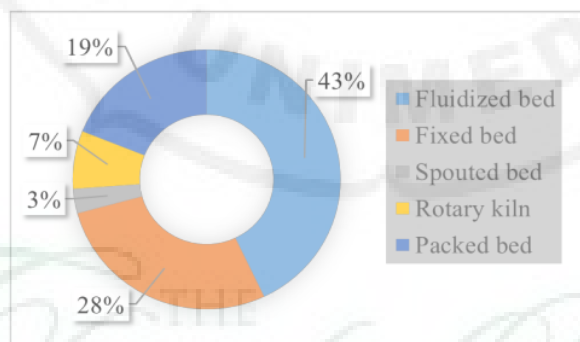


Fig. 3. Research trend based on the reactor type

In pyrolysis, there are three heating methods that are always used by researchers; the fast, medium, and slow heating methods. When the main purpose is to produce pyrolysis oil, then slow pyrolysis is used. These three methods greatly affect the yield and quality of POPW. In addition, the product and POPW quality are also strongly influenced by the temperature and operating time [41-42]. In addition to the pyrolysis of plastic types individually [43-44], combined pyrolysis of all plastics or co-pyrolysis is also presented [45-46]. Figure 4 shows the research on pyrolysis plastics where the

pyrolysis of co-pyrolysis is the most popular. The advantage is that it does not require a sorting system such as the recycling process. The combination of all plastics in the feedstock can be processed because the goal is to produce liquid.

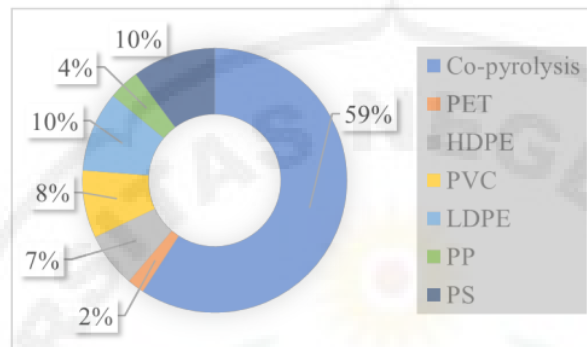


Fig. 4. Research focuses on energy recovery of plastic wastes

Some of the pyrolyzed oil which has been found needs to be characterized as having used internal combustion engines. Some notes state that the fuel content of the resulting POPW still contains a lot of impurities and the probability of cetane number is still low. To obtain fuel with characteristics such as diesel, the distillation process must be carried out at a temperature according to the boiling point of the diesel and the time used [47].

2.3 The Characteristic of POPW

The POPW product obtained must be close to the characteristics and heating value of diesel fuel. Table 3 and Table 4 show the characteristics of POPW, which are very similar to diesel fuel, and the heating value of each plastic type, respectively.

Table 3
 Plastic fuel vs. diesel fuel characteristics

Property	PPO [48]	Diesel [48]	Euro IV Diesel [49]
Density at 30 °C in gm/cc	0.835	0.840	0.807
Ash content, %	0.00023	0.045	-
Gross calorific value (kJ/kg)	44.340	46.500	43.41
Kinematic viscosity, Cst at 40 °C	2.52	2.0	2.64
Cetane number	51	55	55.2
Flashpoint, °C	42	50	-
Fire point, °C	45	57	-
Carbone residues, %	82.49	26	-
Sulfur content, %	0.030	0.045	-
Distillation temperature, °C at 58%	344	328	-
Distillation temperature, °C at 95%	362	340	-

Table 4
 The heating value of each PPO plastic type

Plastic-type	CV (MJ/kg)	Reff
Polyethylene-terephthalate (PET)	43.42	[50]
High-density polyethylene (HDPE)	44.50	[51]
Polyvinil chloride (PVC)	15-25	[15]
Low-density polyethylene (LDPE)	36.50-39.80	-
Polystyrene (PS)	41.40-41.80	[52]
Polypropylene (PP)	44.5	[53]
Bioplastic	31.53	-

3. Recent Development of POPW Utilization in ICE

Along with the increasing fuel requirements and the global warming issue, the POPW can be a target to be developed to increase the supply of fuel needs, especially for motorized vehicles [54]. A number of tests of POPW must be carried out to determine its potential to replace fossil fuels, although to replace 100% is not convincing. Although several research findings reported that the performance of internal combustion engines (ICE) using 100% POPW is similar to that achieved by using pure diesel, the emissions produced are still greater [55]. This makes an even harder effort because it is reported that the use of 100% pyrolysis oil from waste tires cannot fuel the ICE engine but can reduce emissions compared to emissions produced using pure diesel fuel [56]. One of the indicators of a fuel that is suitable for use is its low emission content. According to research, emissions from the transportation sector are the second-largest contributor to Indonesia's overall greenhouse gas emissions, after those from the industrial sector. The four largest contributors to emissions can be seen in the chart shown in Figure 5 below.

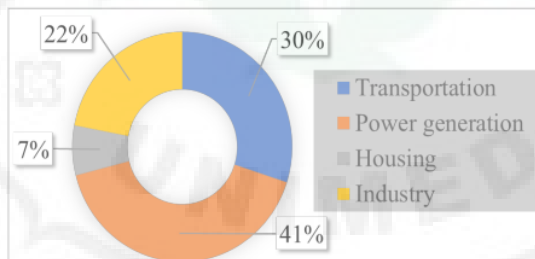


Fig. 5. The largest contributor to emission by sector [57]

In addition, it is hoped that there will be a decrease in emissions if plastic fuel is mixed with diesel. Currently, Indonesia applies the Euro-4 emission standard with the emission threshold as shown in Table 5 below. As a result, all research findings must refer to the established threshold.

Table 5
 The emission threshold value of Euro-4

Fuel	NOx (gr/km)	CO (gr/km)	HC+NOx (gr/km)	PM (gr/km)
Petrol	0.08	1	0.1	-
Diesel	0.25	0.5	0.3	0.025

One of the efforts that can be made is to mix POPW with diesel fuel without modifications to the engine geometry. It is reported that 20% of POPW can be mixed with diesel fuel to improve the performance of diesel engines [58]. The density of diesel does not have much effect on engine

performance, so mixing POPW with diesel can be done, and according to the results of the study, the density of the mixture of POPW with diesel is not too different and tends to be the same [59].

4. Challenges and Opportunities

Energy conservation and diversification efforts are the main keys to energy security. This effort aims to divert attention from petroleum as the main source of energy so that additional energy sources are found and will maintain the stability of the energy supply in the future. As a comparison, a literature review related to energy diversification from biomass states that biomass in Indonesia is sufficient to support energy availability by gasification processing using a downdraft-type gasifier. As much as 3 MJ/m³ of combustible gas products can be produced from biomass classified as wood using a downdraft reactor that can be used to replace fossil fuels in internal combustion engines [60]. The diversification and development of bio-oil from plastic as a fuel substitution in Indonesia is very promising compared to biomass because the heating value of plastic bio-oil is greater than biomass. However, efforts to produce bio-oil from plastic waste have begun to be carried out, and trials have been carried out, but have not yet obtained promising results. Until now, Indonesia has not used liquid fuel from the pyrolysis of plastic waste. Therefore, efforts continue to be made to obtain fuel oil from plastic waste that is close to the characteristics of premium fuels. In addition, the government encourages energy source diversification activities to produce a future energy mix that is more varied.

Acknowledgments

The author is very grateful to the Universitas Negeri Medan for financial support through the DIPA Directorate of Research, Technology, and Community Service, Directorate General of Higher Education, Research, and Technology of the Ministry of Education, Culture, Research, and Technology number SP DIPA-023.171.690523/2022. The author gratefully recognizes the assistance of the mechanical engineering workshop participants as well as the two students who worked on the project's final task.

References

- [1] Ilham, Zul, Nur Aida Izzaty Saad, Wan Abd Al Qadr Imad Wan-Mohtar, and Adi Ainurzaman Jamaludin. 2022. "Multi-Criteria Decision Analysis for Evaluation of Potential Renewable Energy Resources in Malaysia". *Progress in Energy and Environment* 21 (October):8-18. <https://doi.org/10.37934/progee.21.1.818>
- [2] Andrady, Anthony L., and Mike A. Neal. "Applications and societal benefits of plastics." *Philosophical Transactions of the Royal Society B: Biological Sciences* 364, no. 1526 (2009): 1977-1984. <https://doi.org/10.1098/rstb.2008.0304>
- [3] Jha, Kundan Kumar, and T. T. M. Kannan. "Recycling of plastic waste into fuel by pyrolysis-a review." *Materials Today: Proceedings* 37 (2021): 3718-3720. <https://doi.org/10.1016/j.matpr.2020.10.181>
- [4] Igalavithana, Avanthi D., Xiangzhou Yuan, Chammi P. Attanayake, Shujun Wang, Siming You, Daniel CW Tsang, Ange Nzihou, and Yong Sik Ok. "Sustainable management of plastic wastes in COVID-19 pandemic: The biochar solution." *Environmental Research* 212 (2022): 113495. <https://doi.org/10.1016/j.envres.2022.113495>
- [5] Gross, Michael. "Oceans of plastic waste." (2015): R93-R96. <https://doi.org/10.1016/j.cub.2015.01.038>
- [6] Jambeck, Jenna R., Roland Geyer, Chris Wilcox, Theodore R. Siegler, Miriam Perryman, Anthony Andrady, Ramani Narayan, and Kara Lavender Law. "Plastic waste inputs from land into the ocean." *Science* 347, no. 6223 (2015): 768-771.
- [7] Purba, Noir P., Dannisa IW Handyman, Tri D. Pribadi, Agung D. Syakti, Widodo S. Pranowo, Andrew Harvey, and Yudi N. Ihsan. "Marine debris in Indonesia: A review of research and status." *Marine pollution bulletin* 146 (2019): 134-144. <https://doi.org/10.1016/j.marpolbul.2019.05.057>

- [8] Lestari, Prieskarinda, and Yulinah Trihadiningrum. "The impact of improper solid waste management to plastic pollution in Indonesian coast and marine environment." *Marine pollution bulletin* 149 (2019): 110505. <https://doi.org/10.1016/j.marpolbul.2019.110505>
- [9] Perindustrian, Kementrian. "Undang-undang Nomor 3 Tahun 2014 tentang Perindustrian." *Jakarta: Kementrian Perindustrian* (2014).
- [10] Nelles, Michael, Jennifer Gruenes, and Gert Morscheck. "Waste management in Germany—development to a sustainable circular economy?." *Procedia Environmental Sciences* 35 (2016): 6-14. <https://doi.org/10.1016/j.proenv.2016.07.001>
- [11] Dwivedi, Poushpi, P. K. Mishra, Manoj Kumar Mondal, and Neha Srivastava. "Non-biodegradable polymeric waste pyrolysis for energy recovery." *Heliyon* 5, no. 8 (2019): e02198. <https://doi.org/10.1016/j.heliyon.2019.e02198>
- [12] Reynolds, Jemma, Robert Kennedy, Mariah Ichapka, Abhishek Agarwal, Adekunle Oke, Elsa Cox, Christine Edwards, and James Njuguna. "An evaluation of feedstocks for sustainable energy and circular economy practices in a small island community." *Renewable and sustainable energy reviews* 161 (2022): 112360. <https://doi.org/10.1016/j.rser.2022.112360>
- [13] Simanjuntak, Janter Pangaduan, Samsudin Anis, Mochamad Syamsiro, Eka Daryanto, and Bisrul Hapis Tambunan. "Thermal Energy Storage System from Household Wastes Combustion: System Design and Parameter Study." *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences* 80, no. 2 (2021): 115-126. <https://doi.org/10.37934/arfm.80.2.115126>
- [14] Norhuda Abdul Manaf, Zahrul Faizi Mohd Shadzalli, and Nursyuhada' Kamaruzaman. 2022. "Waste-Energy-Climate Nexus Perspective Towards Circular Economy: A Mini-Review". *Journal of Advanced Research in Applied Sciences and Engineering Technology* 26 (1):31-41. <https://doi.org/10.37934/araset.26.1.3141>
- [15] Gradus, Raymond HJM, Paul HL Nillesen, Elbert Dijkgraaf, and Rick J. Van Koppen. "A cost-effectiveness analysis for incineration or recycling of Dutch household plastic waste." *Ecological Economics* 135 (2017): 22-28. <https://doi.org/10.1016/j.ecolecon.2016.12.021>
- [16] Al-Salem, S. M. "Energy production from plastic solid waste (PSW)." In *Plastics to energy*, pp. 45-64. William Andrew Publishing, 2019. <https://doi.org/10.1016/B978-0-12-813140-4.00003-0>
- [17] Schecter, Arnold, ed. *Dioxins and health*. Springer Science & Business Media, 2013.
- [18] Zhang, Guang-Hua, Jun-Feng Zhu, and A. Okuwaki. "Prospect and current status of recycling waste plastics and technology for converting them into oil in China." *Resources, conservation and recycling* 50, no. 3 (2007): 231-239. <https://doi.org/10.1016/j.resconrec.2006.11.007>
- [19] Sasikumar, C., R. Kannan, C. Senthilkumar, R. Sarweswaran, M. Nagaraja, and R. Sundaresan. "Pyrolysis of plastic waste for a better environmental system." *Materials Today: Proceedings* 64 (2022): 1679-1684. <https://doi.org/10.1016/j.matpr.2022.05.388>
- [20] Rajmohan, K. S., Harshit Yadav, S. Vaishnavi, M. Gopinath, and Sunita Varjani. "Perspectives on bio-oil recovery from plastic waste." In *Current Developments in Biotechnology and Bioengineering*, pp. 459-480. Elsevier, 2020. <https://doi.org/10.1016/B978-0-444-64321-6.00023-9>
- [21] Al-Salem, S. M., Ana Antelava, Achilleas Constantinou, George Manos, and Animesh Dutta. "A review on thermal and catalytic pyrolysis of plastic solid waste (PSW)." *Journal of environmental management* 197 (2017): 177-198. <https://doi.org/10.1016/j.jenvman.2017.03.084>
- [22] Aghbashlo, Mortaza, Zahra Khounani, Homa Hosseinzadeh-Bandbafha, Vijai Kumar Gupta, Hamid Amiri, Su Shiung Lam, Tatiana Morosuk, and Meisam Tabatabaei. "Exergoenvironmental analysis of bioenergy systems: a comprehensive review." *Renewable and Sustainable Energy Reviews* 149 (2021): 111399. <https://doi.org/10.1016/j.rser.2021.111399>
- [23] Duarah, Prangan, Dibyajyoti Halidar, Anil Kumar Patel, Cheng-Di Dong, Reeta Rani Singhania, and Mihir Kumar Purkait. "A review on global perspectives of sustainable development in bioenergy generation." *Bioresource Technology* (2022): 126791. <https://doi.org/10.1016/j.biortech.2022.126791>
- [24] Mangesh, V. L., S. Padmanabhan, P. Tamizhdurai, and A. Ramesh. "Experimental investigation to identify the type of waste plastic pyrolysis oil suitable for conversion to diesel engine fuel." *Journal of Cleaner Production* 246 (2020): 119066. <https://doi.org/10.1016/j.jclepro.2019.119066>
- [25] Geyer, Roland, Jenna R. Jambeck, and Kara Lavender Law. "Production, use, and fate of all plastics ever made." *Science advances* 3, no. 7 (2017): e1700782. <https://doi.org/10.1126/sciadv.1700782>
- [26] Sharma, Brajendra K., Bryan R. Moser, Karl E. Vermillion, Kenneth M. Doll, and Nandakishore Rajagopalan. "Production, characterization and fuel properties of alternative diesel fuel from pyrolysis of waste plastic grocery bags." *Fuel Processing Technology* 122 (2014): 79-90. <https://doi.org/10.1016/j.fuproc.2014.01.019>
- [27] Zeaier, J. "A process study on the pyrolysis of waste polyethylene." *Fuel* 133 (2014): 276-282. <https://doi.org/10.1016/j.fuel.2014.05.028>

- [28] Abbas-Abadi, Mehrdad Seifali, Mehdi Nekoomanesh Haghighi, and Hamid Yeganeh. "Evaluation of pyrolysis product of virgin high density polyethylene degradation using different process parameters in a stirred reactor." *Fuel processing technology* 109 (2013): 90-95. <https://doi.org/10.1016/j.fuproc.2012.09.042>
- [29] Jan, M. Rasul, Jasmin Shah, and Hussain Gulab. "Catalytic conversion of waste high-density polyethylene into useful hydrocarbons." *Fuel* 105 (2013): 595-602. <https://doi.org/10.1016/j.fuel.2012.09.016>
- [30] Abbas-Abadi, Mehrdad Seifali, Mehdi Nekoomanesh Haghighi, Hamid Yeganeh, and Armando G. McDonald. "Evaluation of pyrolysis process parameters on polypropylene degradation products." *Journal of analytical and applied pyrolysis* 109 (2014): 272-277. <https://doi.org/10.1016/j.jaap.2014.05.023>
- [31] Hopewell, Jefferson, Robert Dvorak, and Edward Kosior. "Plastics recycling: challenges and opportunities." *Philosophical Transactions of the Royal Society B: Biological Sciences* 364, no. 1526 (2009): 2115-2126. <https://doi.org/10.1098/rstb.2008.0311>
- [32] Sharuddin, Shafferina Dayana Anuar, Faisal Abnisa, Wan Mohd Ashri Wan Daud, and Mohamed Kheireddine Aroua. "A review on pyrolysis of plastic wastes." *Energy conversion and management* 115 (2016): 308-326. <https://doi.org/10.1016/j.enconman.2016.02.037>
- [33] Tulashie, Samuel Kofi, Enoch Kofi Boadu, and Samuel Dapaah. "Plastic waste to fuel via pyrolysis: A key way to solving the severe plastic waste problem in Ghana." *Thermal Science and Engineering Progress* 11 (2019): 417-424. <https://doi.org/10.1016/j.tsep.2019.05.002>
- [34] Basu, Prabir. *Biomass gasification, pyrolysis and torrefaction: practical design and theory*. Academic press, 2018. <https://doi.org/10.1016/B978-0-12-812992-0.00007-8>
- [35] Jha, Kundan Kumar, and T. T. M. Kannan. "Alternate fuel preparation in low cost from waste plastic: A review." *Materials Today: Proceedings* 37 (2021): 3656-3657. <https://doi.org/10.1016/j.matpr.2020.09.802>
- [36] Hasan, Hanapi, Safri Gunawan, Robert Silaban, Ferry Indra Sakti H. Sinaga, and Janter Pangaduan Simanjuntak. "An experimental study of liquid smoke and charcoal production from coconut shell by using a stove of indirect burning type." In *Journal of Physics: Conference Series*, vol. 2193, no. 1, p. 012088. IOP Publishing, 2022. <https://iopscience.iop.org/article/10.1088/1742-6596/2193/1/012088/meta>
- [37] Simanjuntak, Janter P., K. A. Al-attab, and Z. A. Zainal. "Hydrodynamic flow characteristics in an internally circulating fluidized bed gasifier." *Journal of Energy Resources Technology* 141, no. 3 (2019). <https://doi.org/10.1115/1.4041092>
- [38] Kaminsky, Walter. "Chemical recycling of plastics by fluidized bed pyrolysis." *Fuel Communications* 8 (2021): 100023. <https://doi.org/10.1016/j.jfueco.2021.100023>
- [39] Simanjuntak, J. P., E. Daryanto, and B. H. Tambunan. "Performance improvement of biomass combustion-based stove by implementing internally air-distribution." In *Journal of Physics: Conference Series*, vol. 1811, no. 1, p. 012015. IOP Publishing, 2021. <https://iopscience.iop.org/article/10.1088/1742-6596/1811/1/012015/meta>
- [40] Simanjuntak, J. P., E. Daryanto, and B. H. Tambunan. "An operating parameter study of the biomass solid feedstock incinerator of fixed-bed type with two stage air supply." In *Journal of Physics: Conference Series*, vol. 2193, no. 1, p. 012077. IOP Publishing, 2022. <https://iopscience.iop.org/article/10.1088/1742-6596/2193/1/012077/meta>
- [41] López, A., I. De Marco, B. M. Caballero, M. F. Laresgoiti, and A. Adrados. "Influence of time and temperature on pyrolysis of plastic wastes in a semi-batch reactor." *Chemical Engineering Journal* 173, no. 1 (2011): 62-71. <https://doi.org/10.1016/j.cej.2011.07.037>
- [42] Miandad, R., A. S. Nizami, M. Rehan, M. A. Barakat, M. I. Khan, A. Mustafa, I. M. I. Ismail, and J. D. Murphy. "Influence of temperature and reaction time on the conversion of polystyrene waste to pyrolysis liquid oil." *Waste Management* 58 (2016): 250-259. <https://doi.org/10.1016/j.wasman.2016.09.023>
- [43] Zhang, Xuesong, Hanwu Lei, Gayatri Yadavalli, Lei Zhu, Yi Wei, and Yupeng Liu. "Gasoline-range hydrocarbons produced from microwave-induced pyrolysis of low-density polyethylene over ZSM-5." *Fuel* 144 (2015): 33-42. <https://doi.org/10.1016/j.fuel.2014.12.013>
- [44] Tambunan, Bisrul Hapis, and Janter P. Simanjuntak. "Pyrolysis of Plastic Waste into The Fuel Oil." (2018).
- [45] Adnan, Jasmin Shah, and Muhammad Rasul Jan. "Effect of polyethylene terephthalate on the catalytic pyrolysis of polystyrene: Investigation of the liquid products." *Journal of the Taiwan Institute of Chemical Engineers* 51 (2015): 96-102. <https://doi.org/10.1016/j.jtice.2015.01.015>
- [46] Fivga, Antzela, and Ioanna Dimitriou. "Pyrolysis of plastic waste for production of heavy fuel substitute: A techno-economic assessment." *Energy* 149 (2018): 865-874. <https://doi.org/10.1016/j.energy.2018.02.094>
- [47] Wiriyampaiwong, Songchai, and Jindaporn Jamradloedluk. "Distillation of pyrolytic oil obtained from fast pyrolysis of plastic wastes." *Energy Procedia* 138 (2017): 111-115. <https://doi.org/10.1016/j.egypro.2017.10.071>
- [48] Naima, K., and A. Liaid. "Waste oils as alternative fuel for diesel engine: A review." *Journal of Petroleum technology and Alternative fuels* 4, no. 3 (2013): 30-43.
- [49] Chintala, Venkateswarlu, Praveen Godkhe, Shirish Phadtare, Medha Tadpatrikar, J. K. Pandey, and Suresh Kumar. "A comparative assessment of single cylinder diesel engine characteristics with plasto-oils derived from municipal

- mixed plastic waste." *Energy Conversion and Management* 166 (2018): 579-589. <https://doi.org/10.1016/j.enconman.2018.04.068>
- [50] Pradeep, A. Pakiya, and S. Gowthaman. "Extraction of transportation grade fuels from waste LDPE packaging polymers using catalytic pyrolysis." *Fuel* 323 (2022): 124416. <https://doi.org/10.1016/j.fuel.2022.124416>
- [51] Miandad, R., M. A. Barakat, Asad S. Aburiazaiza, M. Rehan, I. M. I. Ismail, and A. S. Nizami. "Effect of plastic waste types on pyrolysis liquid oil." *International biodeterioration & biodegradation* 119 (2017): 239-252. <https://doi.org/10.1016/j.ibiod.2016.09.017>
- [52] Constantinescu, Marius, Felicia Bucura, Roxana-Elena Ionete, Violeta-Carolina Niculescu, Eusebiu Ilarian Ionete, Anca Zaharioiu, Simona Oancea, and Marius Gheorghe Miricioiu. "Comparative study on plastic materials as a new source of energy." *Mater. Plast* 56 (2019): 41-46. <https://doi.org/10.37358/MP.19.1.5119>
- [53] Bow, Yohandri, and L. Sutini Pujiastuti. "Pyrolysis of polypropylene plastic waste into liquid fuel." In *IOP Conference Series: Earth and Environmental Science*, vol. 347, no. 1, p. 012128. IOP Publishing, 2019. <https://iopscience.iop.org/article/10.1088/1755-1315/347/1/012128/meta>
- [54] Singh, Thokchom Subhaschandra, Upendra Rajak, Abhishek Dasore, M. Muthukumar, and Tikendra Nath Verma. "Performance and ecological parameters of a diesel engine fueled with diesel and plastic pyrolyzed oil (PPO) at variable working parameters." *Environmental Technology & Innovation* 22 (2021): 101491. <https://doi.org/10.1016/j.eti.2021.101491>
- [55] Mani, M., C. Subash, and G. Nagarajan. "Performance, emission and combustion characteristics of a DI diesel engine using waste plastic oil." *Applied thermal engineering* 29, no. 13 (2009): 2738-2744. <https://doi.org/10.1016/j.applthermaleng.2009.01.007>
- [56] Parmar, Mitesh D., Saumil C. Patel, Tushar M. Patel, and Prajesh Patel. "Emission analysis of CI engine using tyre pyrolysis oil and diesel blend." *International Journal of Recent Trends in Engineering and Research* (2013): 2455-1457.
- [57] Yudha, Satya Widya. "Air pollution and its implications for Indonesia: Challenges and imperatives for change." Woldbank, Jakarta (2017).
- [58] Rajak, Upendra, Manoj Panchal, Ibhram Veza, Ümit Ağbulut, Tikendra Nath Verma, Suat Saridemir, and Vikas Shende. "Experimental investigation of performance, combustion and emission characteristics of a variable compression ratio engine using low-density plastic pyrolyzed oil and diesel fuel blends." *Fuel* 319 (2022): 123720. <https://doi.org/10.1016/j.fuel.2022.123720>
- [59] Boopathi, R., and E. Gopinath. "Performance analysis of plastic oil blend by changing the fuel injection timing in diesel engine." *Materials Today: Proceedings* 46 (2021): 4613-4618. <https://doi.org/10.1016/j.matpr.2020.09.720>
- [60] Simanjuntak, Janter P., Eka Daryanto, and Bisrul Hapis Tambunan. "Producer gas production of Indonesian biomass in fixed-bed downdraft gasifier as an alternative fuels for internal combustion engines." In *Journal of Physics: Conference Series*, vol. 970, no. 1, p. 012019. IOP Publishing, 2018. <https://iopscience.iop.org/article/10.1088/1742-6596/970/1/012019/meta>

5-Potential of Pyrolytic

ORIGINALITY REPORT

14%

SIMILARITY INDEX

11%

INTERNET SOURCES

8%

PUBLICATIONS

8%

STUDENT PAPERS

PRIMARY SOURCES

1	eprints.utm.my Internet Source	3%
2	www.researchgate.net Internet Source	1%
3	eudl.eu Internet Source	1%
4	www.mdpi.com Internet Source	1%
5	china.iopscience.iop.org Internet Source	1%
6	Submitted to Universitas Muhammadiyah Sumatera Utara Student Paper	<1%
7	Mani, M.. "An experimental investigation on a DI diesel engine using waste plastic oil with exhaust gas recirculation", Fuel, 201008 Publication	<1%
8	Submitted to University of Liverpool Student Paper	<1%

9	pdfslide.net Internet Source	<1 %
10	Agus Saefudin, Henita Rahmayanti, Diana Vivanti Sigit, Agung Purwanto. "Household waste management perspectives in Indonesia: A case study of polymer plastics packaging waste in Kampong Melayu, East Jakarta", AIP Publishing, 2021 Publication	<1 %
11	Submitted to No.55 High School of Beijing Student Paper	<1 %
12	Submitted to Institut Teknologi Kalimantan Student Paper	<1 %
13	Submitted to Segi University College Student Paper	<1 %
14	arpa-e-foa.energy.gov Internet Source	<1 %
15	vergiraporu.com.tr Internet Source	<1 %
16	Qiang Wang, Rui Huang, Rongrong Li. "Impact of the COVID-19 pandemic on research on marine plastic pollution – A bibliometric-based assessment", Marine Policy, 2022 Publication	<1 %
17	globenewswire.com Internet Source	<1 %

18	www.jetir.org Internet Source	<1 %
19	D. Czajczyńska, L. Anguilano, H. Ghazal, R. Krzyżyńska, A.J. Reynolds, N. Spencer, H. Jouhara. "Potential of pyrolysis processes in the waste management sector", Thermal Science and Engineering Progress, 2017 Publication	<1 %
20	Dinesh Mohan, Charles U. Pittman, Philip H. Steele. "Pyrolysis of Wood/Biomass for Bio-oil: A Critical Review", Energy & Fuels, 2006 Publication	<1 %
21	Submitted to THEI Student Paper	<1 %
22	barcelonasail.com Internet Source	<1 %
23	cappindia.in Internet Source	<1 %
24	journals.utm.my Internet Source	<1 %
25	mechta.ub.ac.id Internet Source	<1 %
26	pubs.rsc.org Internet Source	<1 %
27	studentsrepo.um.edu.my Internet Source	<1 %

<1 %

28

www.hks.harvard.edu

Internet Source

<1 %

29

www.no-burn.org

Internet Source

<1 %

30

"Application of Clean Fuels in Combustion Engines", Springer Science and Business Media LLC, 2022

Publication

<1 %

31

A Henihan. "Emissions modeling of fluidised bed co-combustion of poultry litter and peat", Bioresource Technology, 2003

Publication

<1 %

32

"Recent Developments in Plastic Recycling", Springer Science and Business Media LLC, 2021

Publication

<1 %

33

N. Sakthipriya. "Plastic waste management: A road map to achieve circular economy and recent innovations in pyrolysis", Science of The Total Environment, 2021

Publication

<1 %



THE
Character Building
UNIVERSITY