



AJC

by Noto Gultom

THE
Character Building
UNIVERSITY

Submission date: 28-Dec-2018 02:31PM (UTC+0700)

Submission ID: 1060738577

File name: 2_AJC.docx (927.27K)

Word count: 2469

Character count: 15204



Fabrication of Poly(vinyl alcohol)/Bentonite Nanocomposites Using Sol-Gel Method

M. SIRAIT^{1*}, S. GEA², N. SIREGAR¹, N. BUKIT¹, E.M. GINTING¹ and R.F. ZEGA¹

¹Department of Physics, Faculty of Mathematics and Natural Sciences, Universitas Negeri Medan, Jl. Willem Iskandar Pasar V Medan Estate, Medan 20221, Indonesia

²Department of Chemistry, Faculty of Mathematics and Natural Sciences, Universitas Sumatera Utara, Jl. Bioteknologi No. 1, Medan 20155, Indonesia

*Corresponding author. E-mail: maksir@unimed.ac.id

Received: 14 April 2018;

Accepted: 2 July 2018;

Published online: 31 August 2018;

AJC-19045

The aim of this study was to find the characteristics of mechanical, morphological and thermal properties of poly(vinyl alcohol) (PVA)/bentonite nanocomposites. The method used in making nanocomposites is sol-gel method. The natural bentonite (size of 35.26 nm) obtained from North Sumatra, Indonesia, was added to the solution of poly(vinyl alcohol) with the quantity varied, namely 0, 2, 4, 6, 8 wt %. The nanocomposites yielded was then characterized by using tensile test, scanning electron microscopy and differential scanning calorimetry. The results showed that the maximum weight of added bentonite, which improved the mechanical properties and produced more homogenous surface, was 6 wt %, whereas the variation of 2, 4 and 8 wt % of bentonite resulted in a decreased elasticity modulus. However, thermal properties is preferable to improve in the 0 wt % of bentonite.

Keywords: Bentonite, Poly(vinyl alcohol), Sol-gel method, Nanocomposites.

INTRODUCTION

Nanocomposites are solid structures with dimensions of nanometre scale and can also be porous, colloid, gel and copolymer. In general, the nanocomposite material demonstrates different mechanical, electrical, optical, electrochemical, catalytic and structural properties from each component [1]. Based on their matrix materials, nanocomposites can be classified into three different groups, namely ceramic matrix nanocomposites, metal matrix nanocomposites and polymer matrix nanocomposites [2]. Polymer matrix nanocomposites, the system consisting of a polymer or copolymer having nanoparticles or nanofillers dispersed in the polymer matrix, have attracted researchers' attention nowadays due to their advantages in physical properties, such as mechanical and thermal properties over the polymeric system [3].

Currently, the most natural material that is widely used as a nano-sized filler for polymer nanocomposites is bentonite. Natural bentonite processing itself can be conducted by several methods, such as co-precipitation method and ball milling method [4,5]. A nano bentonite-making study using ball mill

and co-precipitation method was obtained with size 35.26 nm [6]. The use of bentonite as reinforcement material for polymer nanocomposites is expected to give preferable modulus, strength and heat resistance. There has been considerable research on the use of bentonite as a filler in polymeric materials due to the high biocompatibility and good gel-forming capability of the polymer [7]. Bukit *et al.* [8] found that the application of bentonite as nanofillers for high density polyethylene (HDPE) polymeric system could enhance the mechanical properties of the system with the best performance at 2-6 wt % of bentonite. Similarly, Ginting *et al.* [9] discovered that the addition of Na-bentonite filler and carbon black could influence the rubber. Related to that, the utilization of bentonite to other polymeric systems needs to be conducted in order to develop the study about polymer nanocomposites.

One of the polymer matrix which has huge application is poly(vinyl alcohol). Besides having hydrophilicity and biocompatibility properties, it also has good thermal stability and is considered as nontoxic material. Because of those properties, PVA has a wide application, such as in home textiles, coating materials and industrial materials [10]. In order to



THE
Character Building
UNIVERSITY

enhance its properties, namely mechanical and thermal properties, some reinforcement materials are applied as the fillers. Turhan *et al.* [11] attempted to fabricate nanocomposites of PVA/modified bentonite, found that there was an improvement in the thermal stabilities over the pure PVA. The method used was the solution intercalation method. Also, Ferrández-Rives *et al.* [12] conducted the research about PVA/bentonite by using electrospinning, they discovered that the nanocomposites gave better properties for the biomedicine and biotechnology application. In addition, Sang *et al.* [13] prepared composite solid alkaline polymer electrolyte PVA-bentonite-KOH-H₂O using solution-casting method and found that the interpolation of bentonite to PVA matrix could increase the KOH content in PVA matrix, thus it improved the conductivity of the system particularly at higher water content.

Based on above explanation, this study aims to investigate the characteristics of mechanical properties, morphology and thermal nanoscale composites on the addition of nano mixtures of natural bentonite particles to the PVA polymer using sol-gel method. Sol-gel method is one of the fastest growing chemical fields and is the process of forming inorganic compounds *via* chemical reactions at low temperature solution, while in the process, there is a phase change from the colloidal suspension (sol) to the liquid phase (gel) [14]. It was employed due to its procedure that is based mainly in water soluble polymers, such as PVA. Therefore, the fabrication of nanocomposite PVA/bentonite using sol-gel method should give another perspective of the study about nanocomposites.

EXPERIMENTAL

The materials used in this study were synthetic bentonite which is obtained from North Tapanuli Pahae District, North Sumatra, Indonesia with size of 35.26 nm [6,15], aquabidest and poly(vinyl alcohol) (PVA) pro-analyst purchased from Sigma-Aldrich. The characterization was conducted using several equipments, namely universal testing machine model UCT-5T by Orientec Corporation Ltd. to test mechanical properties, scanning electron microscopy (SEM) EVO MA 10 Zeiss to discover the surface morphology and differential scanning calorimetry (DSC) (Mettler Toledo type 821) to test the thermal properties.

The synthesis of PVA/bentonite nanocomposite was performed by sol gel method. As much as 24 g of PVA were dissolved into 200 mL of distilled water and stirred at 550 rpm and at 80 °C. After the PVA was completely dissolved, bentonite nanoparticles were added into the solution with the variations of 0, 2, 4, 6 and 8 % for 7 h at 80 °C and stirred 550 rpm until thickened to gel. After the solution thickened, it was inserted into the glass mold to dry and harden at room temperature. Then the sample was printed using [SO 527-2 type 1A for Universal Testing Machine UCT-5T model. Then the sample was characterized by using tensile and SEM. DSC was applied to determine the melting point of the nanocomposite PVA/bentonite.

RESULTS AND DISCUSSION

Mechanical properties analysis: The tensile test was performed to evaluate the effect of the addition of bentonite on the mechanical properties of the nanocomposite membrane.

Fig. 1 shows the tensile strength of PVA/bentonite nanocomposites with the variations in the quantity of bentonite. Tensile strength testing on PVA/bentonite showed that there was an enhancement when the clay content increased from 0 to 2 %, but this value dropped when 4 % of bentonite obtained. The fluctuation kept occurring until 8 % of clay content fulfilled. The strength of PVA/bentonite nanocomposites had a maximum value of 6 % by weight of bentonite. The tensile strength of the PVA/bentonite nanocomposites was largely caused by the agglomeration of the organo-clay particles [16]. This result appears to be associated with a lack of interfacial interactions between clays and polymer matrices. Thus, the large number of defects and agglomerations occurred in the interphase region [17-19]. At the strain value, it was found that for each variation indicated a 100 % increasing as shown in Figs. 2 and 3. This increasing occurred because the dispersed nano-bentonite in the polymer matrix will lead to an improvement in the mechanical properties of the membrane nanocomposite. It has been reported that the addition of coated filler particles can easily improve the mechanical properties of the polymer [20].

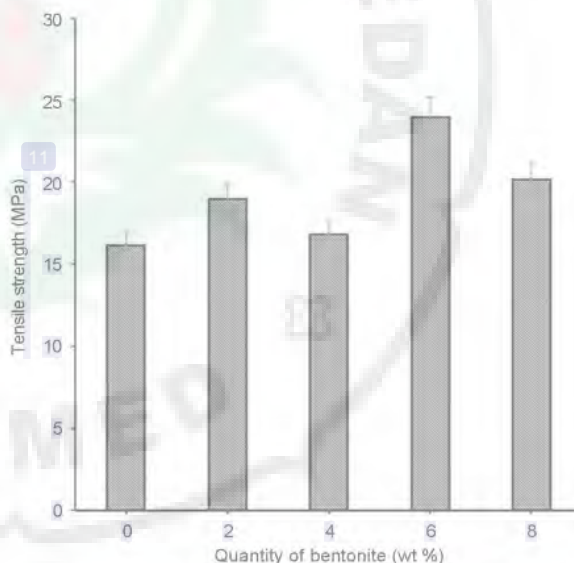


Fig. 1. Tensile strength of PVA/bentonite nanocomposites

Fig. 4 suggests that the addition of bentonite may increase the flexibility of catalyst in PVA [21]. The sharp increase in the addition of nano-bentonite would have an impact on the value of the Young Modulus. It can be assumed that at the high value of increasing-in-length will cause a low modulus value [22]. Finally, based on Fig. 5, it can be seen from the modulus of elasticity of the 6 % bentonite composition has a higher elasticity modulus value compared to the pure PVA. This increasing occurred because there was a strong interaction between the matrix and silicate layers through the formation of hydrogen bonds due to the strong hydrophilicity of the bentonite edge. However, there was also a decreasing in elasticity modulus value in the variation of 2, 4 and 8 % bentonite. It was due to the deployment of bentonite to the PVA which was uneven [23].

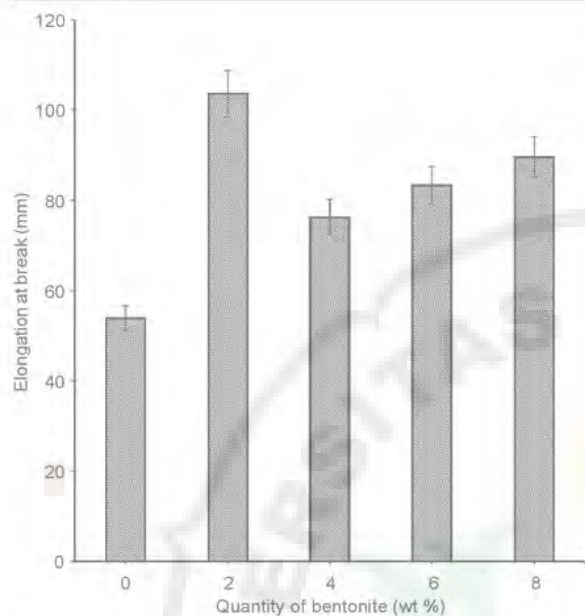


Fig. 2. Elongation at break of PVA/bentonite nanocomposites

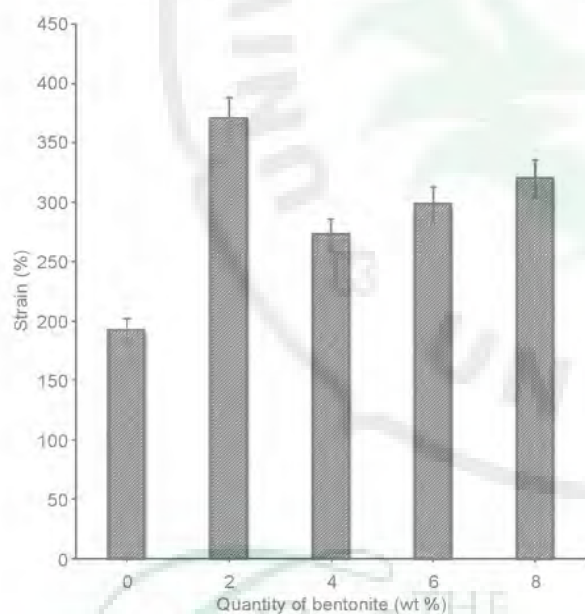


Fig. 3. Strain of PVA/bentonite nanocomposites

Morphology analysis: The gel morphology of each variation of the PVA/bentonite nanocomposites in which the nanobentonite is dispersed on the PVA polymer matrix is shown by Fig. 5. In detail, Fig. 5b, a 2 % PVA/bentonite variation showed a curves and pores on the surface of the gel with a curvature length of 4.122 μm , while the pore length was 1.342 μm . In variation of 4 %, it contained three pores with different sizes, while for variation of 8 % have many pores. For the variation of 6 %, the surface was observed to be flatter, so that fewer pores with a pore length of 0.5237 μm were formed compared to other variations, this was caused by a better bond between the matrix with the filler compared with others.

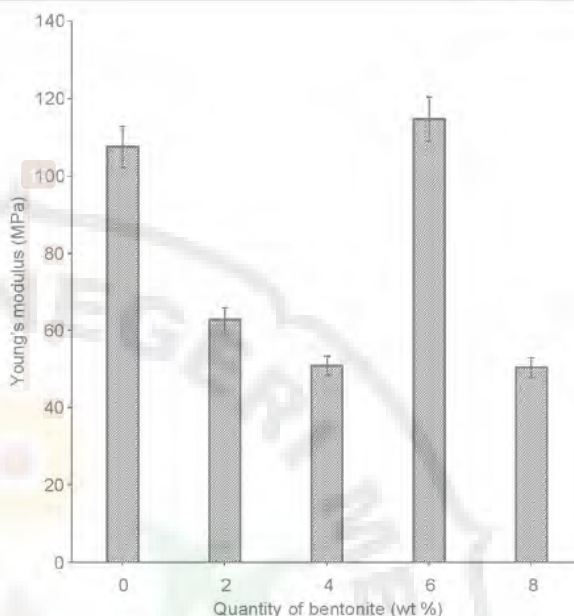


Fig. 4. Young's modulus of PVA/bentonite nanocomposites

The connection between PVA with bentonite can be stable because of the hydrogen bond [24]. The interaction rate between the PVA polymer molecule and bentonite particles depends on the polymer concentration in the dispersion [15]. Bentonite can strengthen a crosslinked PVA nanocomposites membrane with various bentonite concentrations [25].

Thermal properties analysis: The main information gained from DSC analysis regarding thermal properties is the heat involved in thermal event as a function of time and temperature. The heat involved is commonly expressed in term of enthalpy, which is the amount of heat released or adsorbed by the sample during thermal treatment. The negative value of enthalpy means that the sample adsorbs heat, as indicated by the endothermic peak on the DSC thermogram. In addition, DSC analysis provides quantitative information about melting point and phase transition of the sample [26]. As can be seen in Fig. 6, all samples melt at practically the same temperature, but with different enthalpies. From the analysis of DSC in Fig. 6 and Table-1 on the PVA/bentonite particles (0-8) wt % visible the melting point did not increase significantly with the increase of bentonite at 0% of melting point value 223.51 $^{\circ}\text{C}$ with enthalpy of 27.10 J/g, however at the 2-6 % composition there is an increase. These results are in accordance with the references (210-230) $^{\circ}\text{C}$ for full hydrolysis of PVA.

TABLE-1
RESULTS OF THERMAL TESTING OF
DSC NANOCOMPOSITE PVA/BENTONITE

Bentonite (wt %)	Temperature ($^{\circ}\text{C}$)			Entalphy (ΔH , J/g)	Heat (ΔQ , mJ)
	Onset	Melting	Endset		
0	209.05	223.51	228.72	27.10	111.12
2	198.41	219.98	224.89	46.83	192.00
4	208.06	222.09	227.24	62.65	256.87
6	208.15	221.95	227.48	49.65	203.56
8	207.27	221.48	227.37	22.71	93.09

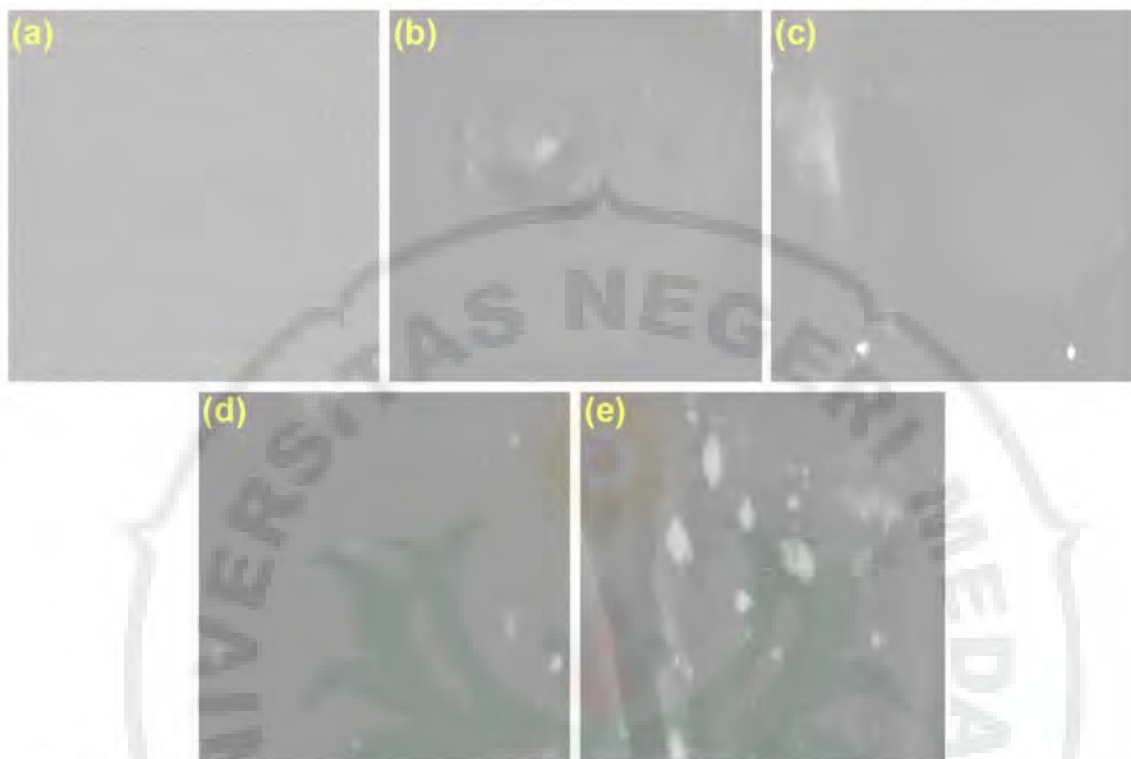


Fig. 5. SEM photograph of PVA/bentonite nanocomposites: (a) pristine PVA, (b) PVA/bentonite with 2 wt % bentonite, (c) PVA/bentonite with 4 wt % bentonite, (d) PVA/bentonite with 6 wt % bentonite, (e) PVA/bentonite with 8 wt % bentonite

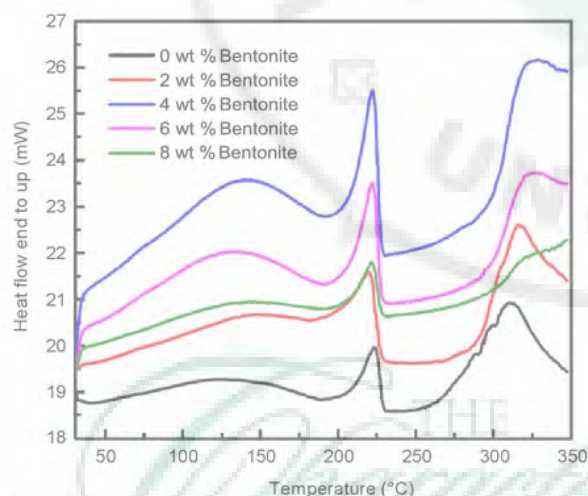


Fig. 6. Overlay thermogram of differential scanning calorimetry (DSC) from PVA/bentonite with bentonite varied 0-8 wt %

Conclusion

Based on the results of mechanical tests of PVA/bentonite nanocomposites, the composition of bentonite (94:6)% gained an average value of the largest Young's modulus of 114.71 MPa. This mixture also obtained a uniform and homogenous morphology. Thermal properties is preferable to occur in the composition of 100:0 %, obtained the melting temperature of 223.51 °C with enthalpy of 27.10 J/g and the heat of 111.12 mJ.

ACKNOWLEDGEMENTS

The authors acknowledge to Directorate of Research and Community Services, Directorate General of Higher Education that has funded this Prime Research Universities with the number contract of 045A/UN33.8/LL/2017. The authors also gratitude to the Rector and Chairman of Research Institute of Universitas Negeri Medan, Medan, Indonesia to support this research work.

CONFLICT OF INTEREST

The authors declare that there is no conflict of interests regarding the publication of this article.

REFERENCES

1. P.M. Ajayan, L.S. Schadler and P.V. Braun, Nanocomposite Science and Technology, WILEY-VCH Verlag GmbH Co. KGaA, Weinheim (2003).
2. P.H.C. Camargo, K.G. Satyanarayana and F. Wypych, *Mater. Res.*, **12**, 1 (2009); <https://doi.org/10.1590/S1516-14392009000100002>.
3. Y.Kojima, K. Fukumori, A. Usuki, A. Okada and T. Kurauchi, *J. Mater. Sci. Lett.*, **12**, 889 (1993); <https://doi.org/10.1007/BF00455608>.
4. S. Hashemian, H. Saffari and S. Ragabion, *Water Air Soil Pollut.*, **226**, 2212 (2015); <https://doi.org/10.1007/s11270-014-2212-6>.
5. R. Saboori, S. Sabbaghi, D. Mowla and A. Soltani, *Int. J. Nano Dimens.*, **3**, 101 (2012); <https://doi.org/10.7508/ijnd.2012.02.002>.
6. M. Sirait, N. Bukit and N. Siregar, *AIP Conf. Proc.*, **1801**, 020006 (2017); <https://doi.org/10.1063/1.4973084>.

7. M. George and T.E. Abraham, *J. Control. Rel.*, **114**, 1 (2006); <https://doi.org/10.1016/j.jconrel.2006.04.017>
8. E. Frida, N. Bukit and M.H. Harahap, *J. Chem. Mater. Res.*, **3**, 10 (2013).
9. E.M. Ginting, N. Bukit, Muliani and E. Frida, *IOP Conf. Ser.: Mater. Sci. Eng.*, **223**, 012003 (2017); <https://doi.org/10.1088/1757-899X/223/1/012003>.
10. Y. Yang, C. Liu and H. Wu, *Polym. Test.*, **28**, 371 (2009); <https://doi.org/10.1016/j.polymertesting.2008.12.008>.
11. Y. Turhan, Z.G. Alp, M. Alkan and M. Dogan, *Micropor. Mesopor. Mater.*, **174**, 144 (2013); <https://doi.org/10.1016/j.micromeso.2013.03.002>.
12. M. Ferrández-Rives, Á. Beltrán-Osuna, J. Gómez-Tejedor and J. Gómez-Ribelles, *Materials*, **10**, 1448 (2017); <https://doi.org/10.3390/ma10121448>.
13. S. Sang, J. Zhang, Q. Wu and Y. Liao, *Electrochim. Acta*, **52**, 7315 (2007); <https://doi.org/10.1016/j.electacta.2007.06.004>.
14. H.S. Hassan, M.F. Elkady, A.H. El-Shazly and H.S. Bamufleh, *J. Nanomater.*, **2014**, 1 (2014); <https://doi.org/10.1155/2014/967492>.
15. P.B. Palani, R. Kannan, S. Rajashabala, S. Rajendran and G. Velraj, *Ionics*, **21**, 507 (2015); <https://doi.org/10.1007/s11581-014-1193-1>.
16. J.H. Chang, T.G. Jang, K.J. Ihn, W.K. Lee and G.S. Sur, *J. Appl. Polym. Sci.*, **90**, 3208 (2003); <https://doi.org/10.1002/app.12996>.
17. J.H. Chang, D.K. Park and K.J. Ihn, *J. Polym. Sci., B, Polym. Phys* **39**, 471 (2001); [https://doi.org/10.1002/1099-0488\(20010301\)39:5<471::AID-POLB1020>3.0.CO;2-6](https://doi.org/10.1002/1099-0488(20010301)39:5<471::AID-POLB1020>3.0.CO;2-6).
18. M. Yang, Y. Gao, J.P. He and H.M. Li, *Express Polym. Lett.*, **1**, 433 (2007); <https://doi.org/10.3144/expresspolymlett.2007.61>.
19. C. Zilg, R. Mühlaupt and J. Finter, *Macromol. Chem. Phys.*, **200**, 661 (1999); [https://doi.org/10.1002/\(SICI\)1521-3935\(19990301\)200:3<661::AID-MACP661>3.0.CO;2-4](https://doi.org/10.1002/(SICI)1521-3935(19990301)200:3<661::AID-MACP661>3.0.CO;2-4).
20. S.Y. Fu, X.Q. Feng, B. Lauke and Y.W. Mai, *Composites Part B*, **39**, 933 (2008); <https://doi.org/10.1016/j.compositesb.2008.01.002>.
21. T. Jose, S.C. George, M.M. G. H.J. Maria, R. Wilson and S. Thomas, *Ind. Eng. Chem. Res.*, **53**, 16820 (2014); <https://doi.org/10.1021/ie502632p>.
22. C. Johansson and F. Clegg, *J. Appl. Polym. Sci.*, **132**, 42229 (2015); <https://doi.org/10.1002/app.42229>.
23. A.A. Sapalidis, F.K. Katsaros, T.A. Steriotis and N.K. Kanellopoulos, *J. Appl. Polym. Sci.*, **123**, 1812 (2012); <https://doi.org/10.1002/app.34651>.
24. B.M. Kudaibergenova, M.K. Beisebekov, S.N. Zhumagalieva, M.M. Beisebekov, Z.A. Abilov and M.I. Chaudhary, *J. Chem. Soc. Pak.*, **35**, 1279 (2013).
25. T. Jose and S.C. George, *Polym. Plast. Technol. Eng.*, **55**, 1266 (2016); <https://doi.org/10.1080/03602559.2015.1132454>.
26. N. Bukit, S. Mekanik, Z. Tanpa and Z. Kalsinasi, *Makara Teknol.*, **16**, 121 (2012).

ORIGINALITY REPORT

20%

SIMILARITY INDEX

17%

INTERNET SOURCES

19%

PUBLICATIONS

7%

STUDENT PAPERS

PRIMARY SOURCES

- 1** journal.ui.ac.id
Internet Source 4%
- 2** Aruna Hardas, Priti Tayade (Gosavi).
"Synthesis and Schematic Mechanism of 3-Phenylamino-4-phenyl-5-tetra-O-acetyl- β -Dglucopyranosylimino- 1,2,4-dithiazolidines and Its De-acetylated Nucleoside", Asian Journal of Chemistry, 2018
Publication 3%
- 3** Junifa Layla Sihombing, Saharman Gea, Ahmad Nasir Pulungan, Harry Agusnar, Basuki Wirjosentono, Yasir Arafat Hutapea. "The characterization of Sarulla natural zeolite crystal and its morphological structure", AIP Publishing, 2018
Publication 1%
- 4** aip.scitation.org
Internet Source 1%
- 5** Prem Singh, Laxmi Tripathi. "Design and Synthesis of Novel N-(4-(Pyridin-2-

yl oxy)benzylidene)-4- [4-
(substituted)phenyl]semicarbazides as
Potential Anticonvulsant Agents", Asian Journal
of Chemistry, 2018

Publication

6

Yasemin Turhan, Zeliha Gamze Alp, Mahir
Alkan, Mehmet Doğan. "Preparation and
characterization of poly(vinylalcohol)/modified
bentonite nanocomposites", Microporous and
Mesoporous Materials, 2013

Publication

1%

7

ru.scribd.com

Internet Source

1%

8

Submitted to Malaviya National Institute of
Technology

Student Paper

1%

9

Sang, S.. "Influences of Bentonite on
conductivity of composite solid alkaline
polymer electrolyte PVA-Bentonite-KOH-H²O",
Electrochimica Acta, 200709

Publication

1%

10

7gi.rocsaninternacional.com

Internet Source

1%

11

www.matec-conferences.org

Internet Source

1%

12

china.iopscience.iop.org

1%

13

Tajinder Singh. "Efficiency of X-PIPS Si(Li) Detector and Bremsstrahlung Spectra in Thick Target Produced by β -Emitter ^{45}Ca ", Asian Journal of Chemistry, 2018

Publication

1%

14

Qing-Zhong Guo, Bo Mei, Shu-Xiang Zhou, Zhi-Guo Shi, Yu-Qi Feng, Jiang-Yu Wu, Guo-Ping Yan, Liang Li. "Synthesis, characterization and application of magnetic-zirconia nanocomposites", Journal of Non-Crystalline Solids, 2009

Publication

<1%

15

Trinh Duy Nguyen, Sang Thanh Vo, Van Thi Thanh Ho, Xuan Tien Le, Long Giang Bach. "Study on Poly(vinyl alcohol) Coated Superparamagnetic Nanoparticles via RAFT Polymerization Methodology for Drug Delivery System Loaded Anti-Inflammatory", Asian Journal of Chemistry, 2018

Publication

<1%

16

www.thefreelibrary.com

Internet Source

<1%

17

pubs.acs.org

Internet Source

<1%

18

www.asianjournalofchemistry.co.in

Internet Source

<1%

19

lrd.yahooapis.com

Internet Source

<1%

20

core.ac.uk

Internet Source

<1%

21

Jong-Su Park. "Colorless polyimide nanocomposite films with pristine clay: Thermal behavior, mechanical property, morphology, and optical transparency", *Polymer Engineering & Science*, 2009

Publication

<1%

22

Joseph Anandraj, Girish M. Joshi. "Zirconia Sulphate Dispersed Polymer Composites for Electronic Applications", *Journal of Inorganic and Organometallic Polymers and Materials*, 2017

Publication

<1%

23

N. Bukit, E M Ginting, I.S Pardede, E. Frida, B.F Bukit. "Mechanical properties of composite thermoplastic hdpe / natural rubber and palm oil boiler ash as a filler", *Journal of Physics: Conference Series*, 2018

Publication

<1%

24

"Liquid-vapor coexistence for nanoparticles of various size", *The Journal of Chemical Physics*,

<1%

2008

Publication

25

Md. Rezaur Rahman, Josephine Lai Chang Hui, Sinin bin Hamdan. "Introduction and reinforcing potential of silica and various clay dispersed nanocomposites", Elsevier BV, 2018

<1%

Publication

Exclude quotes

Off

Exclude matches

Off

Exclude bibliography

On

UNIVERSITAS NEGERI MEDAN
UNIMED
THE
Character Building
UNIVERSITY